


III. Indicator signal lights mounting hole 22 mm


SUS-09, SUS-99-L, SUS-99





SUS-09

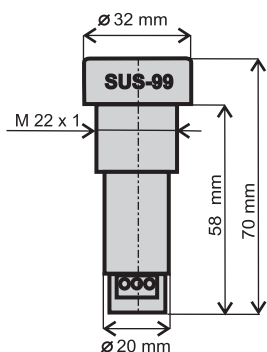


SUS-99




SUS-99-L

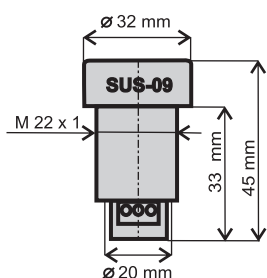


SUS-09-Q



SUS-99-Q



SUS-99-QL



Technical data:

Working voltage:	12.230V AC, DC
Rated current:	max. 20mA
IP code:	after build-in IP65 from front side terminal block IP20
Lighting:	according to LED
Working temperature:	-25.. +65°C
LED diode service life:	up to 100 000 service hours
Mounting hole:	22 mm
Hole pitch:	min. 40 mm
Panel thickness:	max. 12 mm ²
Wiring method:	max. 1,5 mm ²
Volt. suppression:	according to order

Example of order specification:

SUS-99 G/R 230AC P30 execution with a standard luminance
SUS-09 G/R 230AC P30

Type	Colour	Voltage	Volt. Suppression																								
S U S - 9 9	G / R	2 3 0 A C	P 3 0																								
ROUND R SQUARE Q																											
LED ø 3 mm WITH BAR LED L																											
	F flashing																										
		12 V 24 V 60 V 110 V 125 V 220 V 230 V OTHER	P30 TO 30 V P60 TO 60 V P80 TO 80 V P100 TO 100 V P120 TO 120 V																								
			AC ALTERNATING DC DIRECT																								
	<table border="1"> <tr><td>R</td><td>RED</td></tr> <tr><td>G</td><td>GREEN</td></tr> <tr><td>B</td><td>BLUE</td></tr> <tr><td>W</td><td>WHITE</td></tr> <tr><td>Y</td><td>YELLOW</td></tr> <tr><td>O</td><td>ORANGE</td></tr> </table>	R	RED	G	GREEN	B	BLUE	W	WHITE	Y	YELLOW	O	ORANGE	<table border="1"> <tr><td>R</td><td>RED</td></tr> <tr><td>G</td><td>GREEN</td></tr> <tr><td>B</td><td>BLUE</td></tr> <tr><td>W</td><td>WHITE</td></tr> <tr><td>Y</td><td>YELLOW</td></tr> <tr><td>O</td><td>ORANGE</td></tr> </table>	R	RED	G	GREEN	B	BLUE	W	WHITE	Y	YELLOW	O	ORANGE	
R	RED																										
G	GREEN																										
B	BLUE																										
W	WHITE																										
Y	YELLOW																										
O	ORANGE																										
R	RED																										
G	GREEN																										
B	BLUE																										
W	WHITE																										
Y	YELLOW																										
O	ORANGE																										

Accessories: Box spanner M22, see page 24.



Průmyslová 720
682 01 Vyškov CZ

Tel.: +420 517 344 344
Fax: +420 517 333 566

http://www.eleco.cz
e-mail: order@eleco.cz

ISO 9001

