

X-gateway™

The Anybus X-gateway family consists of over 200 proven, robust and ready-to-use gateways aimed to connect almost every possible combination of two industrial networks.

Anybus X-gateway allows system integrators to easily transfer I/O data between devices on two different PLC systems and networks, enabling a consistent information flow throughout the entire plant.



Typical Industries



In-short

Anybus X-gateways enable connectivity between almost any two industrial networks or PLC systems.

Master versions supporting:

AS-Interface
DeviceNet
EtherNet/IP
PROFIBUS

Slave versions supporting:

CANopen
CC-Link
CC-Link IE Field
ControlNet
DeviceNet
EtherCAT
EtherNet/IP
FIPIO
Interbus RS485 + Fiber Optic
J1939*
LonWorks
Modbus Plus
Modbus RTU
Modbus-TCP
PROFIBUS
PROFINET IO
PROFINET IRT Copper + Fibre Optic

Accessories:


Extra Wide DIN-clip for flat mounting
- order number SP1784

*available in a different formfactor housing




HMS provides a full 3 year product guarantee

EXAMPLE: FIELDBUS TO ETHERNET

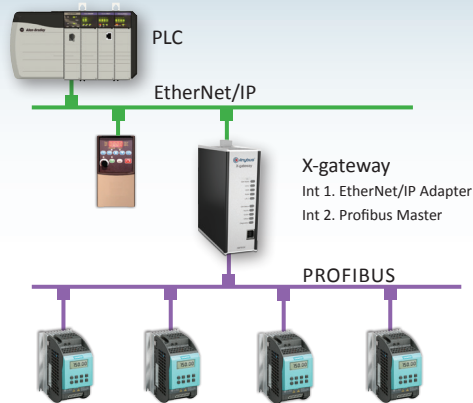

EXAMPLE: ETHERNET TO ETHERNET

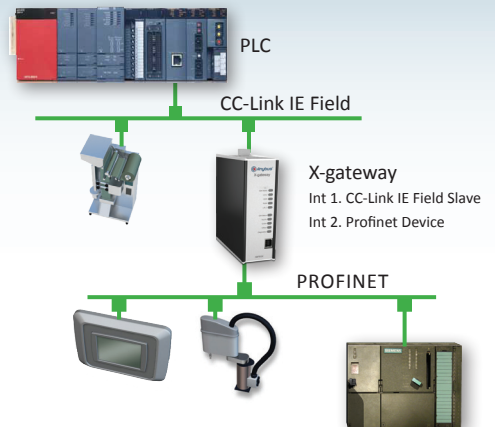

Features and Benefits

- Simple way to transmit I/O data between any two industrial networks
- Over 200 different network combinations (master, scanner, slave, adapter, I/O device, server)
- Connects different PLC systems (Siemens, Rockwell, Schneider, Mitsubishi, Omron, Beckhoff etc)
- I/O data transfer with average throughput between networks of 10 - 15 ms
- Additional parameter data supported (depending on network combination)
- Optional control and status information added to the I/O data for diagnostic purposes
- Included Anybus OPC server for extended functionality with Ethernet versions
- Anybus master configuration tool included free of charge with a Profibus, DeviceNet or EtherNet/IP Master/Scanner
- Robust stand-alone housing with CE and UL certifications
- Global free technical support and consultancy
- See www.anybus.com for application notes and instruction videos on how to configure the X-gateways

Easy Configuration


No programming skills are needed to set up the X-gateway.

The configuration of the X-gateway is made using the "Anybus Configuration Manager X-gateway" which is included in the price (Windows™ Tool). You install this on your PC, and connect the included USB cable to the configuration port of the X-gateway. The Anybus Configuration Manager X-gateway is available at www.anybus.com

The easy-to-use Anybus Configuration Manager X-gateway allows you to define the I/O data sizes on each network side and to define the data mapping and separation between cyclic I/O data and parameter data.

TECHNICAL SPECIFICATIONS

Technical Details		Standard
Weight	400 g, 0,880 lb	
Dimensions (L-W-H)	114*44*127 mm, 4,49*1,73*5,00"	
Protection class	IP20, NEMA rating 1	
Enclosure material	Aluminium and plastic	
Installation position	Vertical position	
Mounting	DIN rail (35*7,5/15)	EN 50022
Certifications		
UL	File number: E203225	UL 508 Ind. Cont. Eq.
Hazardous Locations	CLASS 1, DIVISION 2, GROUPS A, B, C AND D, T4	ISA 12.12.01-2015
ATEX	Zone 2, Cat 3	EN 60079-0:2012+A11:2013 EN 60079-15:2010
CE	2014/30/EU	EN61000-6-4 (2007) EN61000-6-2 (2005)
Electrical Characteristics		
Power	24 VDC +/- 20 %	
Current consumption	Max 400mA at 24VDC, Typical 200 mA at 24VDC	
Hardware Characteristics		
Reverse voltage protection	Yes	
Short circuit protection	No	
Environmental Characteristics		
Operating temp	-25 to 65 °C, -13 to 149 °F (for all other networks) -25 to 50 °C, -13 to 122 °F (only for Profinet IRT Fibre Optic)	IEC 68-2-1, IEC 68-2-2
Storage temp	-40 to 85 °C, -40 to 185 °F	IEC 68-2-1, IEC 68-2-2
Relative Humidity	5-95 % non condensing	IEC 68-2-30
Installation altitude	Up to 2 000 m	
Immunity and Emission for Industrial Environment		
Electrostatic discharge	+/- 4 kV	EN 61000-4-2
Electromagnetic RF fields	10 V/m 80 MHz - 1 GHz 3 V/m 1,4 GHz - 2,0 GHz 1 V/m 2,0 GHz - 2,7 GHz	EN 61000-4-3
Fast Transients	+/- 1 kV	EN 61000-4-4
Surge protection	+/- 1 kV	EN 61000-4-5
RF conducted interference	10 V/rms	EN 61000-4-6
Emission (at 3 m)	50 dB 30 MHz - 230 MHz 57 dB 230 MHz - 1 GHz	EN 55016-2-3
Single Pack Accessories		
• Configuration Cable (USB) • Installation sheet		

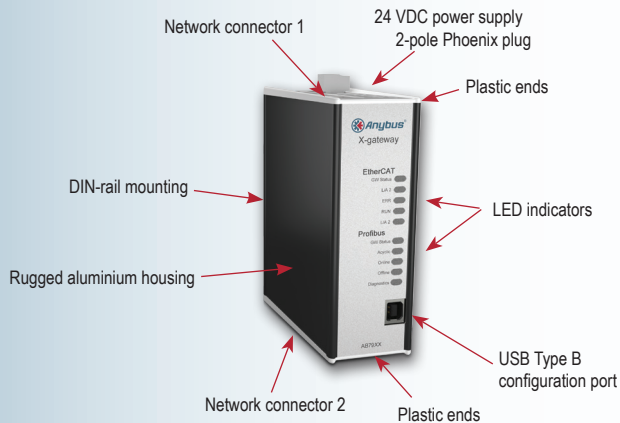

NETWORK SPECIFIC FEATURES

1 = Network connector, 2 = Baud rate,
3 = I/O data, 4 = Other, 5 = Amount of slaves / adapters

MASTER	
ASI	1 = 2*2p; 5,08 Phoenix Plug 2 = 167 kbit/s 3 = 248/186 (digital input/output) 4 = ASI version 3.0 5 = 62
DeviceNet	1 = 5*5p; 5,08 Phoenix Plug 2 = 125-500 kbit/s 3 = 512 byte IN/OUT 4 = DeviceNet 2.0 scanner 5 = 63
EtherNet/IP	1 = RJ45 2 = 10/100 Mbit/s 3 = 509/505 byte IN/OUT 4 = FTP Server, Web Server, SMTP Client 5 = 64
PROFIBUS	1 = DSUB9F 2 = Up to 12 Mb 3 = 512 byte IN/OUT 4 = Profibus DP (IEC 61158) 5 = 125
SLAVE	
CANopen	1 = DSUB9M 2 = Up to 1 Mbit/s 3 = 512 byte IN/OUT 4 = Supports profile CIA DS301 V4.02
CC-Link	1 = 1*5p; 5,08 Phoenix Plug 2 = Up to 10 Mbit/s 3 = 896 IO points, 128 word IN/OUT 4 = Up to 4 occupied stations
CC-Link IE Field	1 = 2*RJ45 2 = Up to 1 Gbp/s 3 = 512 byte IN/OUT 4 = CC-Link IE Field Network intelligent device station
ControlNet	1 = 2*BNC Coax + RJ45 (NAP) 2 = 5 Mbit/s 3 = 450 byte IN/OUT 4 = Communications adapter, profile n. 12
DeviceNet	1 = 1*5p; 5,08 Phoenix Plug 2 = 125-500 kbit/s 3 = 512 byte IN/OUT 4 = Communications adapter, profile n. 12
EtherCAT	1 = 2*RJ45 2 = 100 Mbit/s 3 = 512 byte IN/OUT 4 = DS301 V4.02 compliant, 4 FMMU Channels
EtherNet/IP	1 = 2*RJ45 2 = 10/100 Mbit/s 3 = 509/505 byte IN/OUT 4 = EtherNet/IP group 2 and 3 server. Modbus TCP slave functionality
FIPIO	1 = DSUB9M 2 = 1 Mbit/s 3 = 32 words IN/OUT 4 = Data exchange according to FIPIO Extended Device Profile, Class 0
Interbus RS485	1 = DSUB9F + DSUB9M 2 = 500 kbit/s, 2 Mbit/s 3 = 20 byte IN/OUT (process data), 512 bytes IN/OUT (with PCP) 4 = PCP V.2.0 (0 or 1 word)
Interbus Fibre Optic	1 = HFBR-2505C, HFBR-1505C 2 = 500 kbit/s, 2 Mbit/s 3 = 20 byte IN/OUT (process data), 512 bytes IN/OUT (with PCP) 4 = IEC874-2 and DIN47258
J1939	1 = 1*5p; 5,08 Phoenix Plug (Profibus / EtherNet/IP / Modbus-TCP) DSUB15M (Modbus RTU) 2 = - 3 = 2048 bytes IN/OUT (Modbus RTU), 248-500 (EtherNet/IP), Modbus TCP 499/495 bytes Profibus 4 = SAEJ1939
LonWorks	1 = 1*5p; 5,08 Phoenix Plug 2 = 78 kbit/s 3 = 256 network variables in/out 4 = Lonmark objects handling
Modbus Plus	1 = DSUB9F 2 = 1 Mbit/s 3 = 32 words IN/OUT (global data) 4 = Modbus Plus Host Firmware Rev. 77
Modbus RTU	1 = DSUB9F 2 = 1,2-57,6 kbit/s 3 = 256 registers in each direction 4 = RS232 and RS485
Modbus TCP	1 = 2*RJ45 2 = 10/100 Mbit/s 3 = 512 byte IN/OUT 4 = Supports EtherNet/IP
PROFIBUS	1 = DSUB9F 2 = Up to 12 Mbit/s 3 = Up to 244 bytes data using DP / Up to 512 bytes using DPV1 (Max 344 bytes in+out) 4 = Profibus DP (IEC 61158)
PROFINET-IO	1 = RJ45 2 = 10/100 Mbit/s 3 = 512 byte IN/OUT 4 = RT Communication and Cyclic data exchange
PROFINET IRT	1 = 2*RJ45 2 = 100 Mbit/s 3 = 220 byte IN/OUT 4 = RT Communication and integrated IRT switch functionality
PROFINET IRT Fibre Optics	1 = 2*SC-RJ FO connectors 2 = 100 Mbit/s 3 = 220 byte IN/OUT 4 = RT Communication and integrated IRT switch functionality

HMS Industrial Networks – Worldwide

HMS - Sweden (HQ)

Tel : +46 35 17 29 00 (Halmstad HQ)
Tel: +46 35 17 29 24 (Västerås office)
E-mail: sales@hms-networks.com

HMS - Germany

Tel: +49 721 989777-000
E-mail: ge-sales@hms-networks.com

HMS - Japan

Tel: +81 45 478 5340
E-mail: jp-sales@hms-networks.com

HMS - United States

Tel: +1 312 829 0601
E-mail: us-sales@hms-networks.com

HMS - China

Tel : +86 010 8532 3183
E-mail: cn-sales@hms-networks.com

HMS - India

Tel: +91 83800 66578
E-mail: in-sales@hms-networks.com

HMS - Switzerland

Tel: +41 61 511342-0
E-mail: sales@hms-networks.ch

HMS - France

Tel: +33 368 368 034 (Mulhouse office)
E-mail: fr-sales@hms-networks.com

HMS - Italy

Tel : +39 039 59662 27
E-mail: it-sales@hms-networks.com

HMS - UK

Tel: +44 1926 405599
E-mail: uk-sales@hms-networks.com

Anybus® is a registered trademark of HMS Industrial Networks AB, Sweden, USA, Germany and other countries. Other marks and words belong to their respective companies. All other product or service names mentioned in this document are trademarks of their respective companies.

Part No: MMA201 Version 4 04/2014 - © HMS Industrial Networks - All rights reserved - HMS reserves the right to make modifications without prior notice.

Anybus X-gateway INTERFACE #1

Anybus X-gateway INTERFACE #2

Anybus X-gateway Part number and price group Selection Matrix	Ethernet/rtu slave	Ethernet MBTCP slave	PROFINET-IO slave	EtherCAT slave	CC-Link IE Field slave**	PROFIBUS Slave	Devicenet Slave	CANopen Slave	Modbus RTU slave	CC Link	J1939***	LonWorks	Controlnet Slave	FIP Slave	Intrabus Slave Cu	Intrabus Slave Fo	Modbus Plus Slave	PROFINET IRT slave Cu	PROFINET IRT Slave Fo																							
PROFIBUS Master	AB7900	B	AB7929	B	AB7946	B	AB7986	B	AB7935	B	AB7901	B	AB7902	B	AB7907	B	AB7908	B	AB7910	B	n.a.	-	n.a.	-	n.a.	-	n.a.	-	n.a.	-	n.a.	-	n.a.	-	n.a.	-	n.a.	-				
Devicenet Master	AB7916	B C	AB7930	B	AB7947	B	AB7987	B	AB7955	B	AB7963	B	AB7911	B	AB7916	B	AB7917	B	AB7919	B	n.a.	-	n.a.	-	n.a.	-	AB7903	C	AB7904	C	AB7905	C	AB7906	C	AB7909	C	n.a.	-				
ASI Master	AB7920	B	AB7931	B	AB7948	B	AB7988	B	n.a.	-	AB7921	B	AB7922	B	AB7927	B	AB7928	B	AB7930	B	n.a.	-	n.a.	-	n.a.	-	AB7912	C	AB7924	C	AB7925	C	AB7926	C	AB7929	C	n.a.	-	n.a.	-		
Ethernet Master	AB7968	B	AB7969	B	AB7970	B	AB7999	B	AB7957	B	AB7971	B	AB7972	B	AB7977	B	AB7978	B	AB7980	B	n.a.	-	n.a.	-	n.a.	-	AB7973	C	AB7974	C	AB7975	C	AB7976	C	AB7979	C	n.a.	-	n.a.	-		
CANopen Master	AB7906	*	AB7908	*	AB7907	*	AB7900	*	n.a.	-	AB7901	*	AB7902	*	AB7904	*	AB7905	*	AB7906	*	n.a.	-	n.a.	-	n.a.	-	AB7903	*	n.a.	-	n.a.	-	n.a.	-	n.a.	-	AB7909	*	n.a.	-		
Modbus MBTCP Master	AB9006	*	AB9008	*	AB9007	*	AB9000	*	n.a.	-	AB9001	*	AB9002	*	AB9004	*	AB9005	*	AB9006	*	n.a.	-	n.a.	-	n.a.	-	AB9003	*	n.a.	-	n.a.	-	n.a.	-	n.a.	-	AB9009	*	n.a.	-		
Ethernet/rtu slave	AB7931	A	AB7932	A	AB7949	A	AB7982	A	AB7956	A	AB7932	A	AB7933	A	AB7938	A	AB7939	A	AB7941	A	AB7965	A	AB7966	A	AB7942	C	AB7934	C	AB7935	C	AB7936	C	AB7937	C	AB7939	C	n.a.	-	n.a.	-		
Ethernet MBTCP slave	AB7932	A	AB7933	A	AB7950	A	AB7901	A	AB7958	A	AB7934	A	AB7935	A	AB7940	A	AB7941	A	AB7943	A	AB7945	A	AB7965	A	AB7944	C	AB7936	C	AB7937	C	AB7938	C	AB7939	C	AB7942	C	n.a.	-	n.a.	-		
PROFINET IO slave	AB7948	A	AB7950	A	AB7951	A	AB7964	A	AB7954	A	AB7952	A	AB7953	A	AB7958	A	AB7959	A	AB7960	A	AB7961	A	n.a.	-	n.a.	-	AB7954	C	AB7955	C	AB7956	C	AB7957	C	AB7959	C	n.a.	-	n.a.	-		
EtherCAT slave	AB7982	A	AB7901	A	AB7984	A	AB7900	A	AB7900	A	AB7961	A	AB7962	A	AB7961	A	AB7982	A	AB7982	A	AB7984	A	n.a.	-	n.a.	-	AB7987	C	AB7988	C	AB7989	C	AB7990	C	AB7993	C	n.a.	-	n.a.	-		
CC-Link IE Field slave**	AB7936	A	AB7938	A	AB7954	A	AB7961	A	n.a.	-	AB7955	A	AB7956	A	AB7963	A	AB7964	A	AB7965	A	AB7962	A	AB7915	A	AB7953	C	AB7945	C	AB7946	C	AB7947	C	AB7948	C	AB7951	C	AB7913	C	AB7914	C		
PROFIBUS Slave	AB7932	A	AB7934	A	AB7952	A	AB7958	A	AB7959	A	AB7943	A	AB7944	A	AB7949	A	AB7950	A	AB7951	A	AB7952	A	n.a.	-	n.a.	-	AB7954	C	AB7955	C	AB7956	C	AB7957	C	AB7959	C	AB7960	C	AB7940	C		
Devicenet Slave	AB7933	A	AB7935	A	AB7953	A	AB7958	A	AB7959	A	AB7944	A	AB7945	A	AB7954	A	AB7955	A	AB7956	A	AB7957	A	n.a.	-	n.a.	-	AB7954	C	AB7955	C	AB7956	C	AB7957	C	AB7959	C	AB7960	C	AB7940	C		
CANopen Slave	AB7938	A	AB7940	A	AB7958	A	AB7991	A	AB7991	A	AB7948	A	AB7959	A	AB7959	A	AB7964	A	AB7964	A	AB7965	A	n.a.	-	n.a.	-	AB7968	C	AB7976	C	AB7976	C	AB7984	C	AB7989	C	AB7990	C	AB7943	C		
Modbus RTU slave	AB7939	A	AB7941	A	AB7959	A	AB7992	A	AB7992	A	AB7950	A	AB7950	A	AB7955	A	AB7960	A	AB7960	A	AB7962	A	AB7912	A	See AB7909	C	AB7968	C	AB7977	C	AB7977	C	AB7984	C	AB7989	C	AB7990	C	AB7943	C		
CC Link slave	AB7941	A	AB7943	A	AB7961	A	AB7984	A	n.a.	-	AB7952	A	AB7952	A	AB7957	A	AB7962	A	AB7962	A	AB7963	A	n.a.	-	n.a.	-	AB7962	C	AB7971	C	AB7979	C	AB7986	C	AB7982	C	AB7924	C	n.a.	-		
LonWorks	AB7942	C	AB7944	C	AB7962	C	AB7956	C	n.a.	-	AB7953	C	AB7953	C	n.a.	-	n.a.	-	n.a.	-	AB7953	C	n.a.	-	n.a.	-	AB7953	C	AB7953	C	AB7953	C	AB7953	C	AB7953	C	AB7953	C	n.a.	-		
Controlnet Slave	AB7934	C	AB7936	C	AB7954	C	AB7987	C	n.a.	-	AB7945	C	AB7945	C	AB7948	C	AB7949	C	AB7950	C	AB7951	C	n.a.	-	n.a.	-	AB7948	C	AB7949	C	AB7950	C	AB7951	C	AB7952	C	AB7953	C	AB7954	C	n.a.	-
FIP Slave	AB7935	C	AB7937	C	AB7955	C	AB7988	C	n.a.	-	AB7946	C	AB7946	C	AB7949	C	AB7950	C	AB7951	C	AB7952	C	n.a.	-	n.a.	-	AB7949	C	AB7950	C	AB7951	C	AB7952	C	AB7953	C	AB7954	C	AB7955	C	n.a.	-
Intrabus Slave Cu	AB7936	C	AB7938	C	AB7956	C	AB7989	C	n.a.	-	AB7947	C	AB7947	C	AB7950	C	AB7951	C	AB7952	C	AB7953	C	n.a.	-	n.a.	-	AB7949	C	AB7950	C	AB7951	C	AB7952	C	AB7953	C	AB7954	C	AB7955	C	n.a.	-
Intrabus Slave Fo	AB7937	C	AB7939	C	AB7957	C	AB7990	C	n.a.	-	AB7948	C	AB7948	C	AB7951	C	AB7952	C	AB7953	C	AB7954	C	n.a.	-	n.a.	-	AB7950	C	AB7951	C	AB7952	C	AB7953	C	AB7954	C	AB7955	C	AB7956	C	n.a.	-
Modbus Plus	AB7940	C	AB7942	C	AB7960	C	AB7993	C	n.a.	-	AB7941	C	AB7941	C	AB7944	C	AB7945	C	AB7946	C	AB7947	C	n.a.	-	n.a.	-	AB7944	C	AB7945	C	AB7946	C	AB7947	C	AB7948	C	AB7949	C	AB7950	C	n.a.	-
PROFINET IRT slave Fo	AB7942	C	n.a.	-	n.a.	-	n.a.	-	n.a.	-	AB7943	C	AB7943	C	AB7946	C	AB7947	C	AB7948	C	AB7949	C	n.a.	-	n.a.	-	AB7946	C	AB7947	C	AB7948	C	AB7949	C	AB7950	C	AB7951	C	AB7952	C	n.a.	-

Please note: There are three price groups for Anybus X-gateways. The correct price group is indicated on the right of each part number. (price group A, B and C). Go to the Networking Products Pricelist to get the prices A, B and C.

The abbreviation "n.a." indicates that the product is currently not available in the standard Anybus product offer from HMS.

** X-gateway CANopen and Modbus TCP have a different pricelist.

*** X-gateway CC-Link IE Field and other new combinations are only available in the new X-gateway release with revision F from Q2-2014.

**** X-gateway J1939 and AB7967 are not included in the new X-gateway release and will remain unchanged.

2014-04-07