


# Solid State Relays

## Zero Switching

### Types RGC Solid State Contactor 'E' Connection

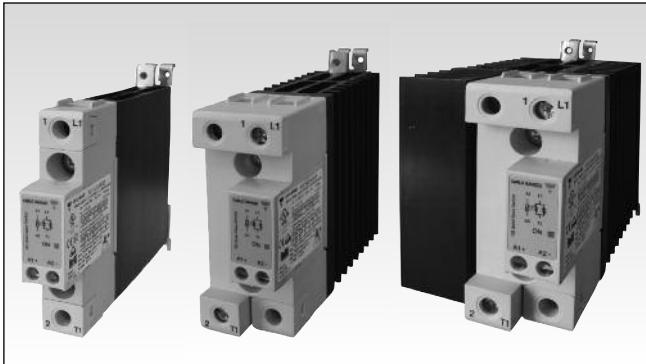

- Product Width ranging from 17.5mm up to 70mm
- Rated Operational voltage: Up to 600VAC
- Rated Operational current: Up to 85AAC @ 40°C
- Up to 6600A<sup>2</sup>s for I<sup>2</sup>t and 1200Vp blocking voltage
- Control voltages: 3-32 VDC, 20-275 VAC (24-190 VDC)
- IP20 protection
- Design according to EN/IEC60947-4-2, EN/IEC60947-4-3, EN/IEC62314, UL508, CSA 22-2 No. 14-10
- Integrated voltage transient protection with varistor
- RoHS compliant
- Short circuit current rating: 100kA
- VDE approval
- Germanischer Lloyd approval<sup>1</sup>

## Product Description

This new range of solid state contactors presents a unique opportunity to maximize efficiency in panel space and is an evolution of solid state switches for which Carlo Gavazzi is very well known.

The nominal current ratings are at 40°C. The smallest width is 17.5mm and is rated at 20 AAC. Power and control terminals allow for safe looping of cables.

Voltage transient protection is standard across the output with a varistor. Specifications are stated at 25°C unless otherwise noted.

1. Germanischer Lloyd approval applicable only to models RGC1....15.KE, RGC1...20.KE and RGC1....30.KE

## Ordering Key **RGC 1 A 60 A 30 K K E**

|                             |                      |
|-----------------------------|----------------------|
| Solid state relay           | <input type="text"/> |
| Number of poles             | <input type="text"/> |
| Switching mode              | <input type="text"/> |
| Rated operational voltage   | <input type="text"/> |
| Control voltage             | <input type="text"/> |
| Rated operational current   | <input type="text"/> |
| Connection type for control | <input type="text"/> |
| Connection type for power   | <input type="text"/> |
| Connection configuration    | <input type="text"/> |
| Option                      | <input type="text"/> |

## Ordering Key

| 1Phase SSR<br>with heatsink | Rated Voltage              | Control Voltage            | Rated Current <sup>2</sup> | Connection Control | Connection Power | Connection Configuration | Option                                     |
|-----------------------------|----------------------------|----------------------------|----------------------------|--------------------|------------------|--------------------------|--|
| <b>RGC1A: ZC</b>            | 23: 230V +10% - 15%, 800Vp | D: 3 or 4-32VDC            | 15: 20AAC                  | K: Screw           | K: Screw         | E: Contactor             | P: Overtemperature protection <sup>3</sup> |
| <b>RGC1B: IO</b>            | 60: 600V +10% -15%, 1200Vp | A: 20 - 275VAC, 24-190 VDC | 20: 23AAC                  | G: Box clamp       | G: Box Clamp     |                          |  |
|                             |                            |                            | 30: 30AAC                  | M: Pluggable       |                  |                          |  |
|                             |                            |                            | 40: 40AAC                  | spring-loaded      |                  |                          |  |
|                             |                            |                            | 60: 60AAC                  |                    |                  |                          |  |
|                             |                            |                            | 90: 85AAC                  |                    |                  |                          |  |

2. Refer to derating curves

3. Default control connection for RGC...P is Box Clamp. See connections specifications.

## Selection Guide (ZC= Zero Cross Switching, IO = Instant-On Switching, OTP= Over Temperature Protection )

| Rated Output Voltage | Blocking Voltage | Connection Control/ Power | Control Voltage             | Rated Operational Current @ 40°C |               |                |               |                |
|----------------------|------------------|---------------------------|-----------------------------|----------------------------------|---------------|----------------|---------------|----------------|
|                      |                  |                           |                             | 20 AAC                           | 23 AAC        | 23AAC + OTP    | 30 AAC        | 30AAC + OTP    |
| 230VAC, ZC           | 800Vp            | Screw <sup>3</sup> /Screw | 3 - 32VDC <sup>4</sup>      | RGC1A23D15KKE                    | RGC1A23D20KKE | RGC1A23D20GKEP | RGC1A23D30KKE | RGC1A23D30GKEP |
|                      |                  | Spring/Screw              | 3 - 32VDC                   | RGC1A23D15MKE                    | RGC1A23D20MKE | -              | RGC1A23D30MKE | -              |
|                      |                  | Screw /Screw              | 20 - 275VAC,<br>24 - 190VDC | RGC1A23A15KKE                    | RGC1A23A20KKE | -              | RGC1A23A30KKE | -              |
|                      |                  | Spring/Screw              | 20 - 275VAC,<br>24 - 190VDC | RGC1A23A15MKE                    | RGC1A23A20MKE | -              | RGC1A23A30MKE | -              |
| 600VAC, ZC           | 1200Vp           | Screw <sup>3</sup> /Screw | 4 - 32VDC <sup>4</sup>      | RGC1A60D15KKE                    | RGC1A60D20KKE | RGC1A60D20GKEP | RGC1A60D30KKE | RGC1A60D30GKEP |
|                      |                  | Spring/Screw              | 4 - 32VDC                   | RGC1A60D15MKE                    | RGC1A60D20MKE | -              | RGC1A60D30MKE | -              |
|                      |                  | Screw <sup>3</sup> /Screw | 20 - 275VAC,<br>24 - 190VDC | RGC1A60A15KKE                    | RGC1A60A20KKE | RGC1A60A20GKEP | RGC1A60A30KKE | RGC1A60A30GKEP |
|                      |                  | Spring/Screw              | 20 - 275VAC,<br>24 - 190VDC | RGC1A60A15MKE                    | RGC1A60A20MKE | -              | RGC1A60A30MKE | -              |
| 600VAC, IO           | 1200Vp           | Screw/Screw               | 4 - 32VDC                   | RGC1B60D15KKE                    | RGC1B60D20KKE | -              | RGC1B60D30KKE | -              |

4. DC control voltage range for RGC.D..P is 5 - 32VDC

**Selection Guide** (ZC= Zero Cross Switching, IO = Instant-On Switching, OTP = Over Temperature Protection ) (cont)

| Rated Output Voltage | Blocking Voltage | Connection Control/ Power     | Control Voltage          | Rated Operational Current @ 40°C |                |               |                |
|----------------------|------------------|-------------------------------|--------------------------|----------------------------------|----------------|---------------|----------------|
|                      |                  |                               |                          | 40AAC                            | 40AAC + OTP    | 60AAC         | 60AAC + OTP    |
| 230VAC, ZC           | 800Vp            | Screw/Box Clamp               | 3 - 32VDC                | RGC1A23D40KGE                    | -              | RGC1A23D60KGE | -              |
|                      |                  | Spring/Box Clamp              | 3 - 32VDC                | RGC1A23D40MGE                    | -              | -             | -              |
|                      |                  | Screw/Box Clamp               | 20 - 275VAC, 24 - 190VDC | RGC1A23A40KGE                    | -              | RGC1A23A60KGE | -              |
|                      |                  | Spring/Box Clamp              | 20 - 275VAC, 24 - 190VDC | RGC1A23A40MGE                    | -              | -             | -              |
| 600VAC, ZC           | 1200Vp           | Screw <sup>3</sup> /Box Clamp | 4 - 32VDC <sup>4</sup>   | RGC1A60D40KGE                    | RGC1A60D40GGEP | RGC1A60D60KGE | RGC1A60D60GGEP |
|                      |                  | Spring/Box Clamp              | 4 - 32VDC                | RGC1A60D40MGE                    | -              | -             | -              |
|                      |                  | Screw <sup>3</sup> /Box Clamp | 20 - 275VAC, 24 - 190VDC | RGC1A60A40KGE                    | RGC1A60A40GGEP | RGC1A60A60KGE | RGC1A60A60GGEP |
|                      |                  | Spring/Box Clamp              | 20 - 275VAC, 24 - 190VDC | RGC1A60A40MGE                    | -              | -             | -              |
| 600VAC, IO           | 1200Vp           | Screw/Box Clamp               | 4 - 32VDC                | RGC1B60D40KGE                    | -              | RGC1B60D60KGE | -              |

| Rated Output Voltage | Blocking Voltage | Connection Control/ Power | Control Voltage          | Rated Operational Current @ 40°C |  |  |  |
|----------------------|------------------|---------------------------|--------------------------|----------------------------------|--|--|--|
|                      |                  |                           |                          | 85AAC + fan + OTP                |  |  |  |
| 230VAC, ZC           | 800Vp            | Box Clamp/Box Clamp       | 5 - 32VDC                | RGC1A23D90GGEP                   |  |  |  |
| 600VAC, ZC           | 1200Vp           | Box Clamp/Box Clamp       | 5 - 32VDC                | RGC1A60D90GGEP                   |  |  |  |
|                      |                  | Box Clamp/Box Clamp       | 20 - 275VAC, 24 - 190VDC | RGC1A60A90GGEP                   |  |  |  |

3. Default control connection for RGC...P is Box Clamp. See connections specifications.

4. DC control voltage range for RGC..D..P is 5 - 32VDC

**Output Voltage Specifications**

|                           | RGC..23..                        | RGC..60..                       |
|---------------------------|----------------------------------|---------------------------------|
| Operational Voltage Range | 24-240 VAC,<br>+10%, -15% on max | 42-600 VAC,<br>+10% -15% on max |
| Blocking Voltage          | 800Vp                            | 1200 Vp                         |
| Internal Varistor         | 275V                             | 625V                            |

**General Specifications**

|                                 |  |   |                                     |
|---------------------------------|--|---|-------------------------------------|
| Latching voltage (across L1-T1) | $\leq 20V$   | Over-voltage category                                     | III<br>(fixed installations)        |
| Operational frequency range     | 45 to 65Hz   | Isolation   |                                     |
| Power factor                    | > 0.5 @ Vrated   | Input to Output RGC...<br>RGC..D..P<br>RGC..A..P          | 4000 Vrms<br>2500 Vrms<br>4000 Vrms |
| Touch Protection                | IP20   | Input and Output to case RGC...<br>RGC..D..P<br>RGC..A..P | 4000 Vrms<br>4000 Vrms<br>4000 Vrms |
| Control input status            | continuously ON Green LED, when control input is applied           | Input to Fan/ Alarm Output RGC..A..P                      | 2500 Vrms                           |
| Pollution degree                | 2<br>(non-conductive pollution with possibilities of condensation) |   |                                     |

## Output specifications (@ 25°C unless otherwise specified)

|   | RGC..15..            | RGC..20..            | RGC..30..             | RGC..40..            | RGC..60..            | RGC..90..            |
|---|----------------------|----------------------|-----------------------|----------------------|----------------------|----------------------|
| Rated operational current <sup>6</sup><br>AC-51 rating @ Ta=25°C  | 20 AAC               | 25.5 AAC             | 30 AAC                | 47.4 AAC             | 70.4 AAC             | 85 AAC               |
| AC-51 rating @ Ta=40°C  | 20 AAC               | 23 AAC               | 30 AAC                | 40 AAC               | 60 AAC               | 85 AAC               |
| AC-53a rating @ Ta=40°C   | 5 AAC                | 5 AAC                | 8 AAC                 | 13 AAC               | 14.8 AAC             | 18 AAC               |
| Number of motor starts<br>(x:6, Tx:6s, F:50%) at 40°C <sup>5</sup>  | 30                   | 30                   | 30                    | 30                   | 30                   | 30                   |
| Min. operational current  | 150 mAAC             | 150 mAAC             | 250 mAAC              | 400 mAAC             | 400 mAAC             | 400 mAAC             |
| Rep. overload current -<br>(Motor Rating) PF = 0.4 - 0.5<br>UL508: T <sub>AMB</sub> =40°C, t <sub>ON</sub> =1s, t <sub>OFF</sub> =9s,<br>50cycles | 60 AAC               | 60 AAC               | 84 AAC                | 126 AAC              | 144 AAC              | 168 AAC              |
| Maximum transient surge current (I <sub>TSM</sub> ), t=10ms   | 325 Ap               | 325 Ap               | 600 Ap                | 800Ap                | 800Ap                | 1150Ap               |
| Maximum off-state leakage current<br>at rated voltage   | 3 mA                 | 3 mA                 | 3 mA                  | 3 mA                 | 3 mA                 | 3 mA                 |
| I <sup>2</sup> t for fusing (t=10ms) Minimum  | 525 A <sup>2</sup> s | 525 A <sup>2</sup> s | 1800 A <sup>2</sup> s | 3200A <sup>2</sup> s | 3200A <sup>2</sup> s | 6600A <sup>2</sup> s |
| Critical dv/dt (@ T <sub>j</sub> init = 40°C)   | 1000 V/us            | 1000 V/us            | 1000 V/us             | 1000 V/us            | 1000 V/us            | 1000 V/us            |

5. Overload current profile definition: x: multiple of AC53a rating, Tx: duration of current surge, F: duty cycle

6. See derating curves

## Overtemperature alarm specifications for RGC...P

|   | RGC..D..P          | RGC..A..P          |
|---|--------------------|--------------------|
| Output type   | PNP open collector | Potential Free     |
| Normal state  | Closed             | Closed             |
| Maximum current rating  | 50 mADC            | 50 mADC            |
| Rated voltage (EN61131-2: 2003) <sup>8,7</sup> , U <sub>a</sub> | 24VDC -15%, +20%   | 24VDC -15%, +20%   |
| Rated voltage, U <sub>s</sub>                                   | RGC...D90GGEP      | 24VDC ± 10%        |
| Fan rating, U <sub>f</sub>                                      | RGC...A90GGEP      | N/A                |
| Alarm voltage drop  | Typical<br>Maximum | 2.8VDC<br>4VDC     |
| Visual Indication   | Continuous Red LED | Continuous Red LED |
| Reverse polarity protection                                     | 24VDC              | 24VDC              |

7: DC supply for alarm signal should be supplied from a Class 2 power source

8: Maximum voltage to be applied between 11+ and 12- (U<sub>a</sub>) terminals should be 35VDC maximum with reference to A2-

## Input specifications


|                                     | RGC..D.. <sup>9</sup>             | RGC..A..                    |
|-------------------------------------|-----------------------------------|-----------------------------|
| Control voltage range <sup>10</sup> | RGC..23..                         | 3 - 32 VDC                  |
|                                     | RGC..60..                         | 4 - 32 VDC                  |
|                                     | RGC...P (Uc)                      | 5 - 32 VDC                  |
| Pick-up voltage                     | RGC..23..<br>RGC..60..<br>RGC...P | 3.0 VDC<br>3.8 VDC<br>5 VDC |
| Drop-out voltage                    |                                   | 1 VDC                       |
| Maximum Reverse voltage             |                                   | 32 VDC                      |
| Response time pick-up ZC (RGC1A..)  |                                   | 0.5 cycle + 500µs @ 24VDC   |
| Response time pick-up IO (RGC1B..)  |                                   | 350µs @ 24 VDC              |
| Response time drop-out              |                                   | 0.5 cycle + 500µs @ 24VDC   |
| Input current @ 40°C                |                                   | See diagrams below          |
|                                     |                                   | See diagrams below          |

9. DC control to be supplied by class 2 power source


10. For GL approved models control range for RGC1.23... is 4-32VDC and for RGC1.60... 5-32VDC

### RG..A..

RGC1 .. A : input current vs input voltage


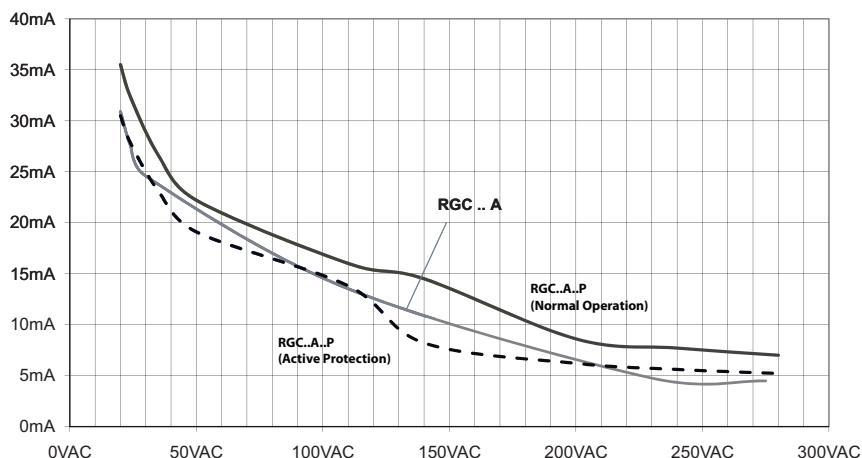


RGC1 .. A : input current vs input voltage

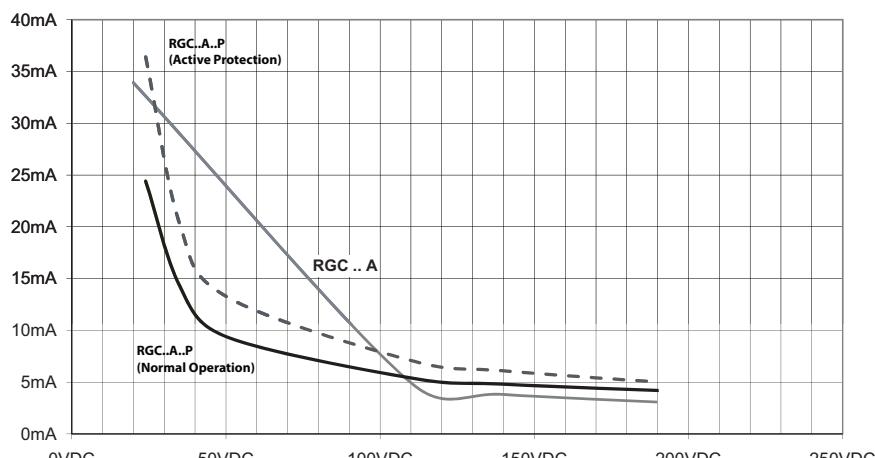

## Input specifications (cont.)


### RG..D..

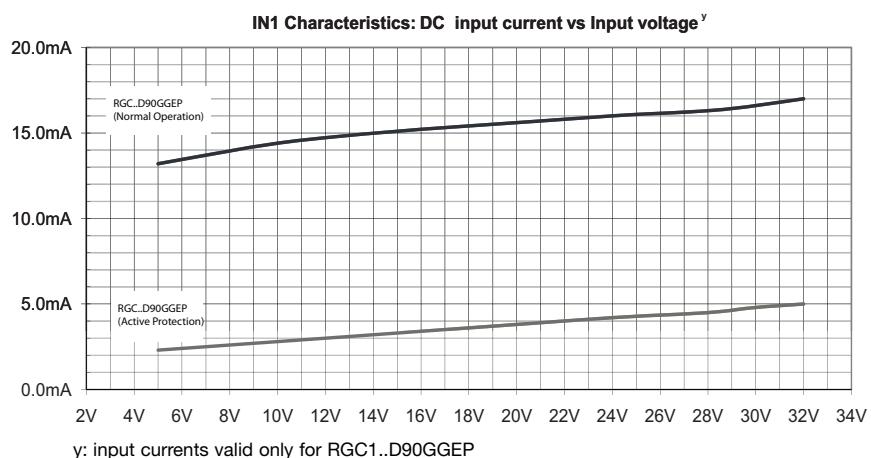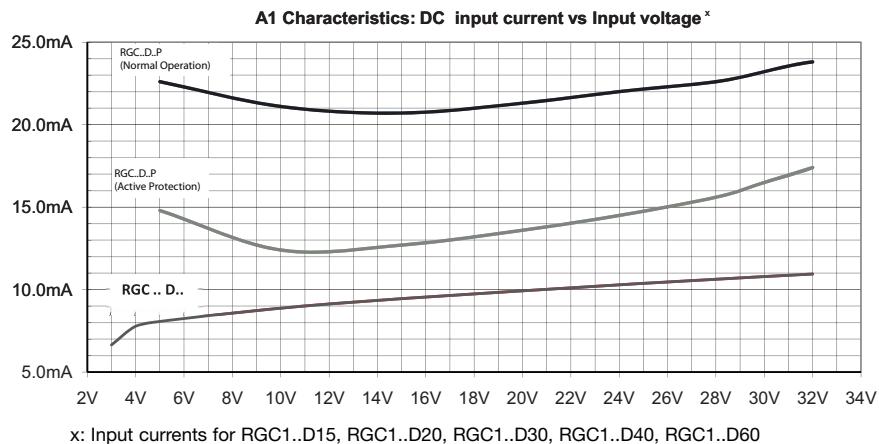

## Motor Ratings: HP (UL508) / kW (EN/IEC60947-4-2) @ 40°C

|             | <b>115 VAC</b>  | <b>230 VAC</b> | <b>400 VAC</b> | <b>480 VAC</b> | <b>600 VAC</b> |
|-------------|-----------------|----------------|----------------|----------------|----------------|
| RGC..15     | 1/3 HP / 0.18kW | 1HP / 0.37kW   | 2HP / 0.75kW   | 3HP / 1.1kW    | 3HP / 1.5kW    |
| RGC..20     | 1/2HP / 0.18kW  | 1-½HP / 0.37kW | 2HP / 0.75kW   | 3HP / 1.1kW    | 3HP / 1.5kW    |
| RGC..30     | 3/4HP / 0.37kW  | 2HP / 1.1kW    | 3HP / 1.5kW    | 5HP / 2.2kW    | 5HP / 3.7kW    |
| RGC..40     | 1HP / 0.56kW    | 3HP / 1.5kW    | 5HP / 2.2kW    | 5HP / 3.7kW    | 7-½HP / 4kW    |
| RGC..60     | 1-½HP / 0.56kW  | 3HP / 1.5kW    | 5HP / 3kW      | 7-½HP / 4kW    | 10HP / 4kW     |
| RGC..90GGEP | 2HP / 0.75kW    | 5HP / 1.5kW    | 7½HP / 4kW     | 10HP / 4kW     | 15HP / 5.5kW   |


## Detailed Over temperature Alarm Procedure (for RGC...P)

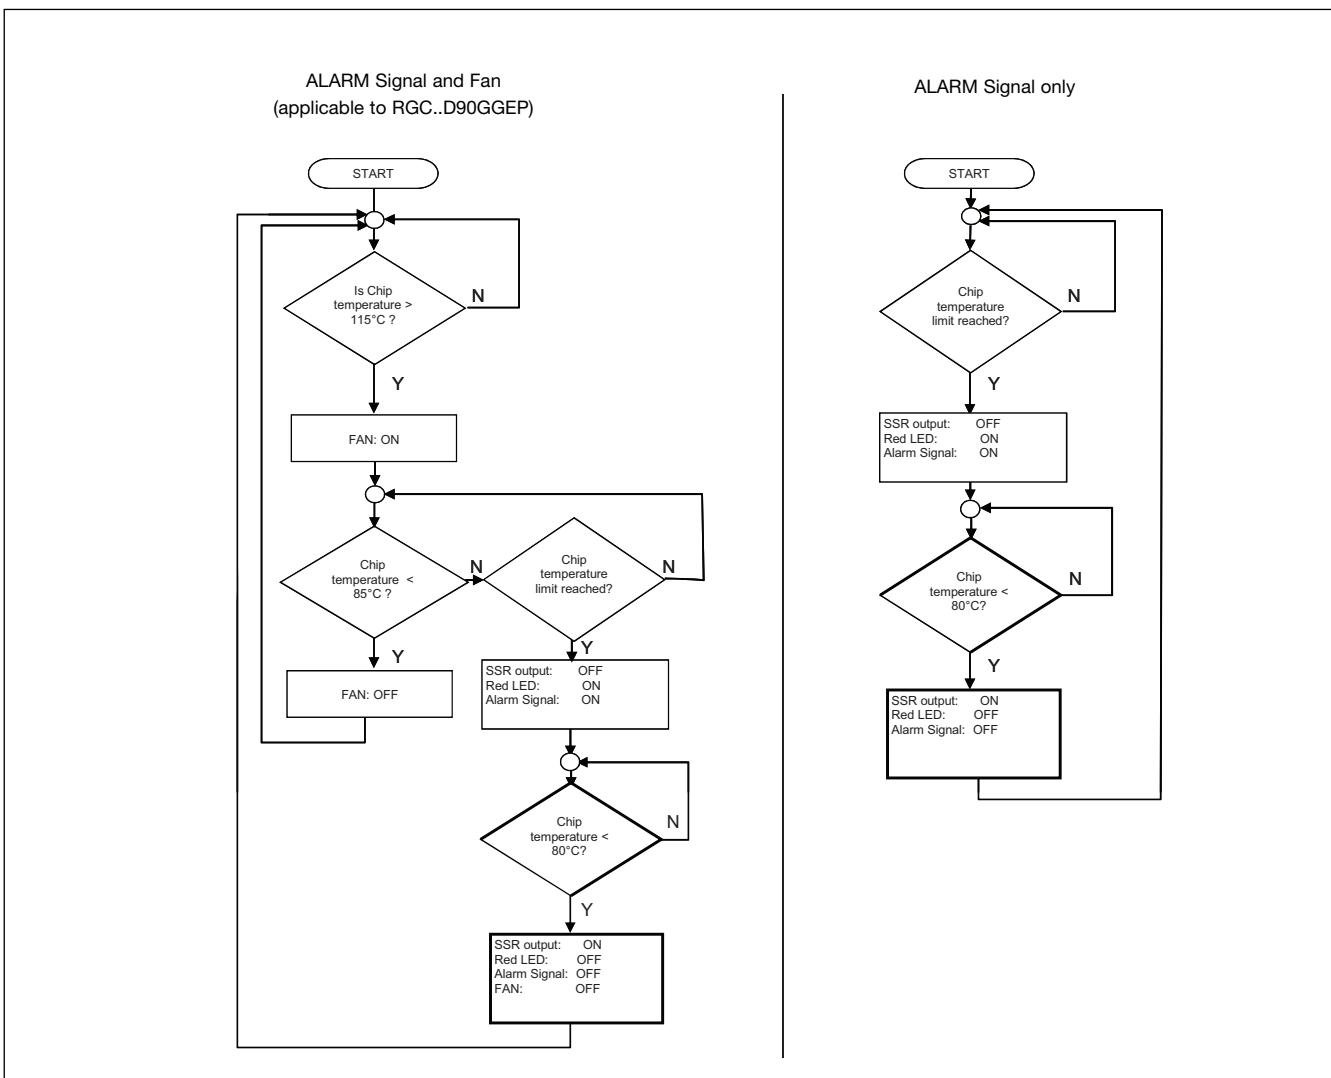


### CAUTION

- Alarm condition resets whenever the voltage signal is removed from terminal A1 (+)
- In the case of RGC..D90GGEP, if the voltage signal is not applied across A1(+) and A2 (-) terminals, the overtemperature detection and functionality is lost (including fan operation and alarm signalling)
- In the case of RGC1A60A90GGEP it is necessary to supply IN2 and IN3 with 24VDC for fan operation.
- Alarm procedure for RGC1A60A90GGEP follows 'Alarm signal only' flow since fan is continuously operating.
- Alarm condition automatically resets ONLY when power semiconductor temperature < 80°C
- Temperatures indicated are typical figures.

## Output Power Dissipation

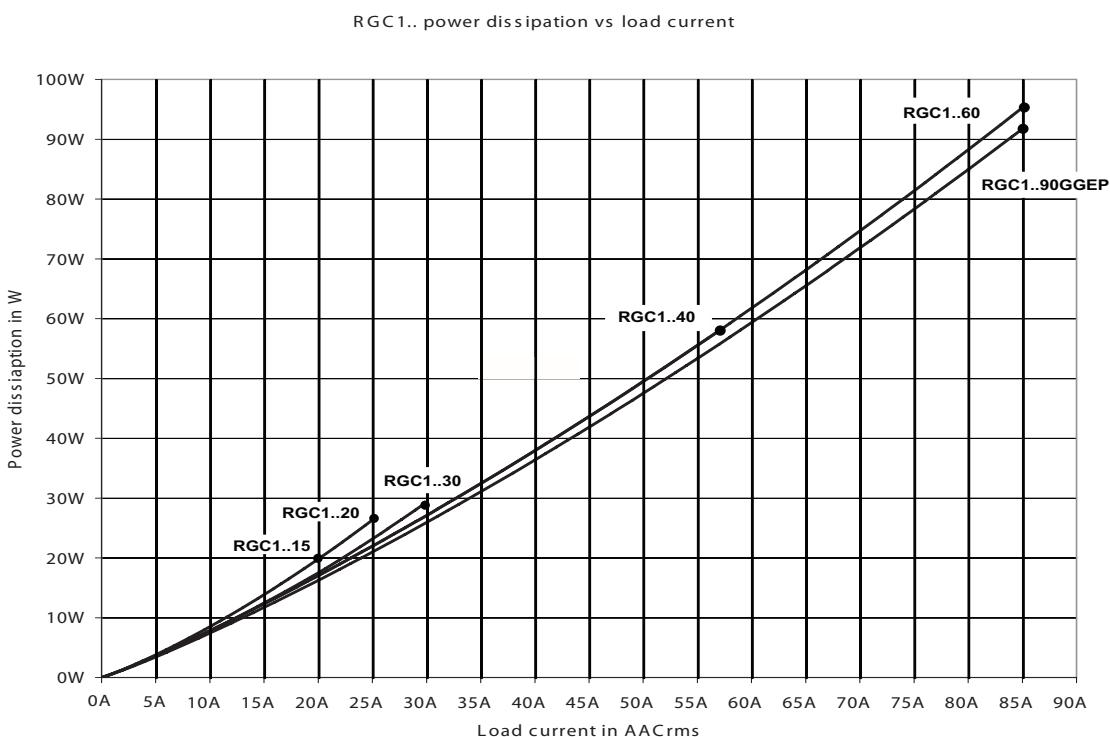


## Current Derating (UL508)

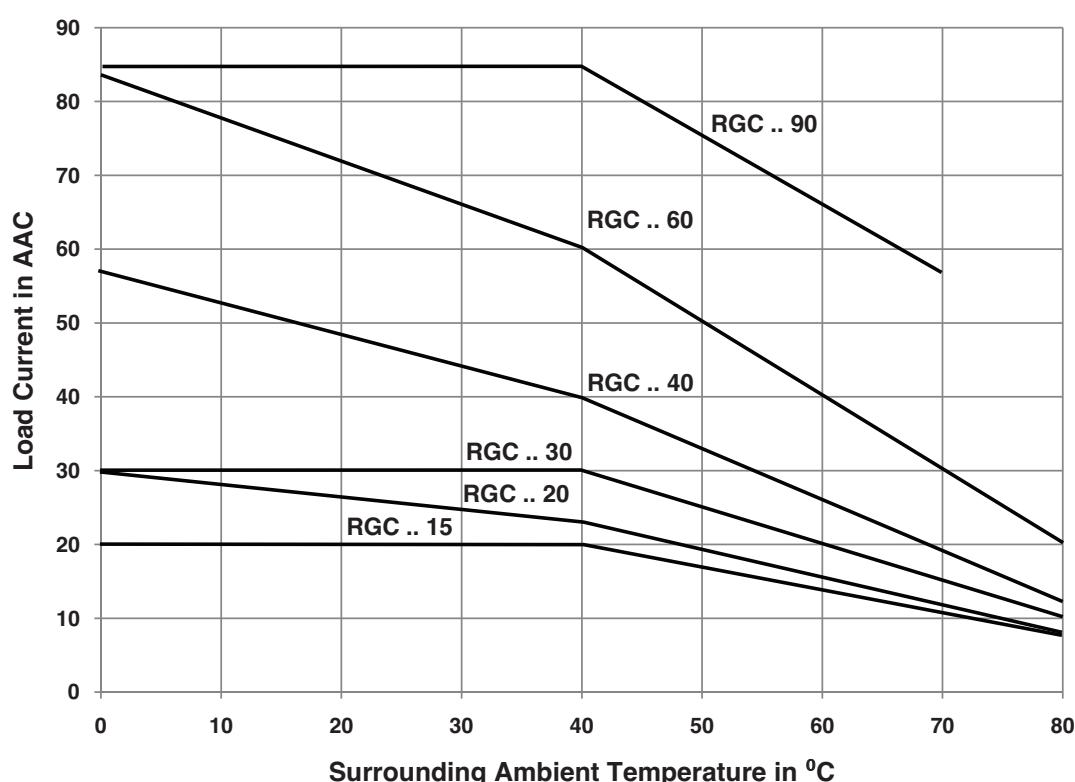


RGC...P models max. operating temperature is + 70°C

## Derating vs. Spacing Curves


RGC.. 15..

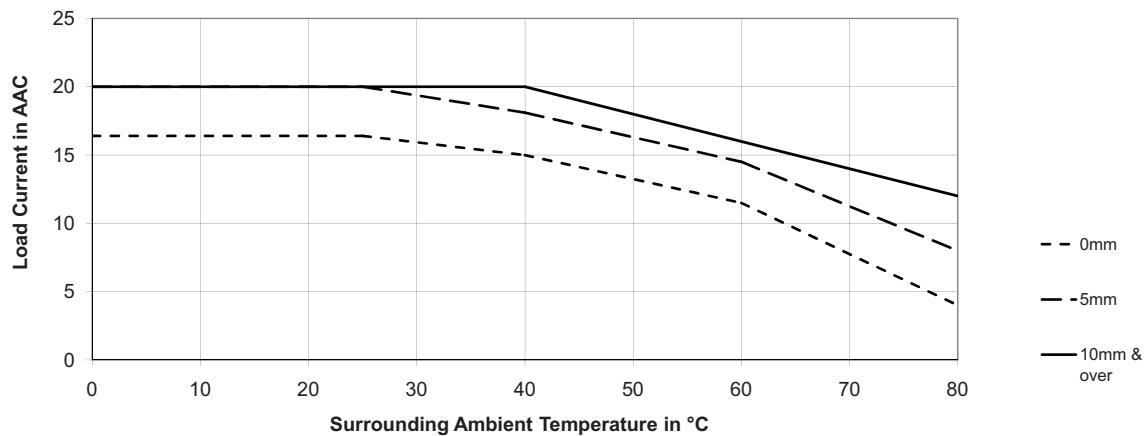

RGC.. 20..

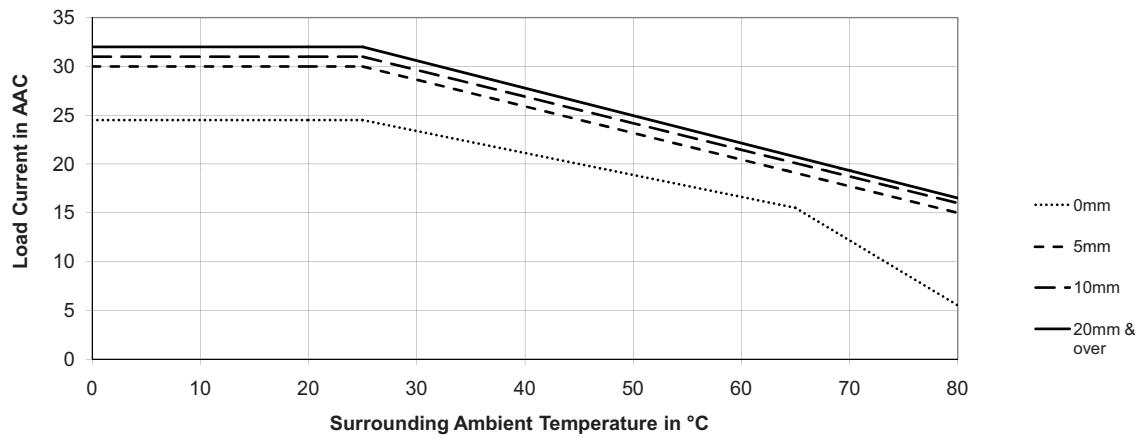


RGC.. 30..

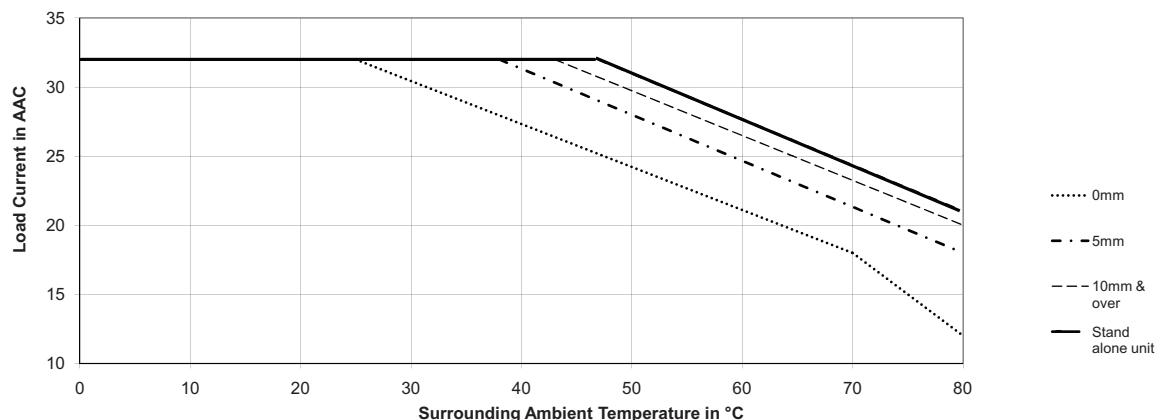


## Derating vs. Spacing Curves


RGC.. 40..

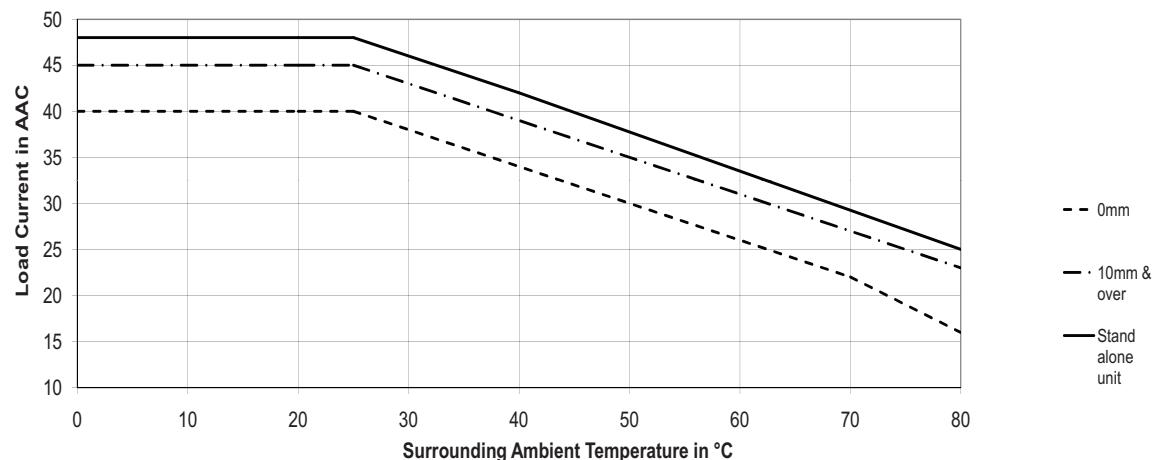

RGC.. 60..

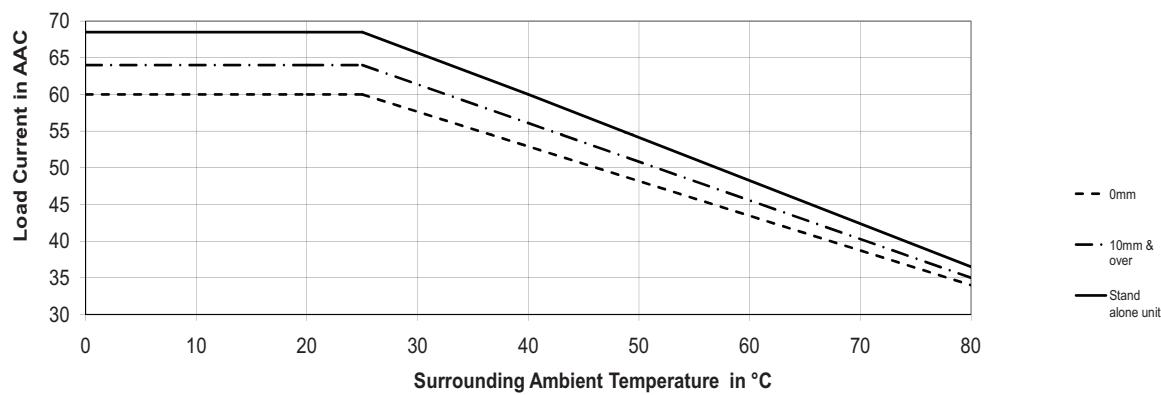

RGC.. 90GGEP

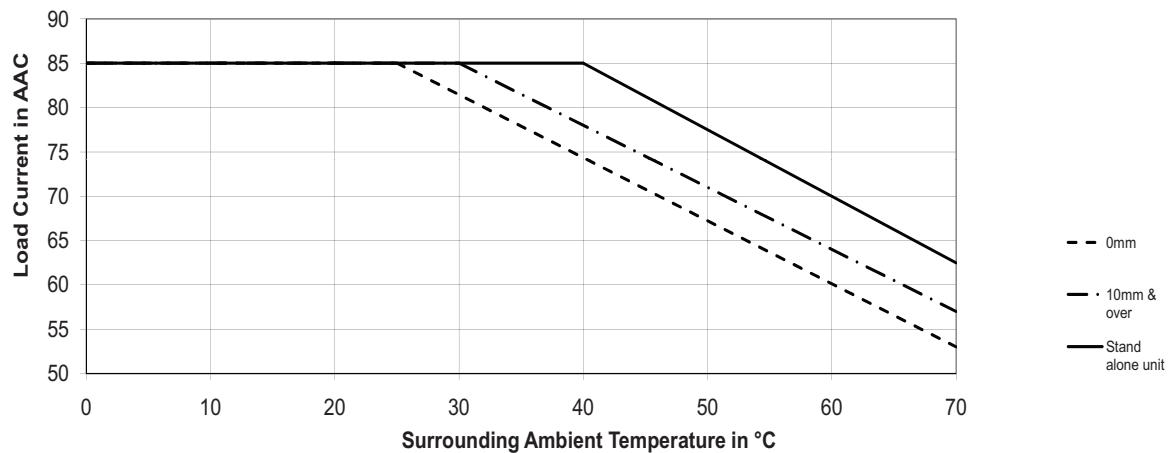

## Agency Approvals and Conformances

|                                     |  |                         |  |
|-------------------------------------|--|-------------------------|--|
| <b>Conformance</b>                  | IEC/EN 62314<br>IEC/EN 60947-4-2<br>IEC/EN 60947-4-3 | <b>Agency Approvals</b> | UL508 Listed (E172877)<br>cUL Listed (E172877)<br>VDE 0660-109<br>GL <sup>12</sup> |
| <b>Short Circuit Current Rating</b> |  |                         | 100kA, UL508   |



## Electromagnetic Compatibility

|   |   |   |                        |
|---|---|---|------------------------|
| <b>EMC Immunity</b>                               | IEC/EN 61000-6-2  | <b>Electrical Surge Immunity</b><br>(for RGC...EP)  | IEC/EN 61000-4-5       |
| <b>Electrostatic Discharge (ESD)</b>              |   |   |                        |
| <b>Immunity</b>                                   | IEC/EN 61000-4-2  |   |                        |
| Air discharge, 8kV                                | Performance Criteria 1  | Output, line to line, 1kV                           | Performance Criteria 1 |
| Contact, 4kV                                      | Performance Criteria 1  | Output, line to earth, 2kV                          | Performance Criteria 1 |
| <b>Electrical Fast Transient</b>                  |   | DC lines, line to line, 500V                        | Performance Criteria 2 |
| <b>(Burst) Immunity</b>                           | IEC/EN 61000-4-4  | DC lines, line to earth, 500V                       | Performance Criteria 2 |
| Output: 2kV, 5kHz                                 | Performance Criteria 1  | Signal lines, line to earth, 1kV                    | Performance Criteria 2 |
| Input: 1kV, 5kHz                                  | Performance Criteria 1  |   |                        |
| <b>Electrical Surge Immunity</b><br>(for RGC...E) | IEC/EN 61000-4-5  | <b>Radiated Radio Frequency</b><br><b>Immunity</b>  | IEC/EN 61000-4-3       |
| Output, line to line, 1kV                         | Performance Criteria 1  | 10V/m, 80 - 1000 MHz                                | Performance Criteria 1 |
| Output, line to earth, 2kV                        | Performance Criteria 1  | 10V/m, 1.4 - 2 GHz                                  | Performance Criteria 1 |
| Input, line to line, 1kV                          | Performance Criteria 2  | 3V/m, 2 - 2.7 GHz                                   | Performance Criteria 1 |
| Input, line to earth, 2kV                         | Performance Criteria 2  |   |                        |
| <b>EMC Emission</b>                               | IEC/EN 61000-6-4  | <b>Conducted Radio Frequency</b><br><b>Immunity</b> | IEC/EN 61000-4-6       |
| <b>Radio Interference</b>                         |   | 10V/m, 0.15 - 80 MHz                                | Performance Criteria 1 |
| <b>Voltage Emission (Conducted)</b>               | IEC/EN 55011  | <b>Voltage Dips Immunity</b>                        | IEC/EN 61000-4-11      |
| <b>0.15 - 30MHz</b>                               | Class A (industrial) with filters<br>- see filter information | 0% for 10ms/20ms,<br>40% for 200ms<br>70% for 500ms | Performance Criteria 2 |
|   | IEC/EN 60947-4-2, 60947-4-3                                   |   | Performance Criteria 2 |
|   | Class A (no filtering needed)                                 |   |                        |
| <b>Voltage Interruptions Immunity</b>             | 0% for 5000ms   |   |                        |
|   |   |   |                        |
| <b>Radio Interference</b>                         |   |   |                        |
| <b>Field Emission (Radiated)</b>                  |   |   |                        |
|   |   | <b>30 - 1000MHz</b>                                 | IEC/EN 55011           |
|   |   |   | Class A (industrial)   |

## Environmental Specifications

|  |                                  |  |                           |
|--|----------------------------------|--|---------------------------|
| <b>Operating Temperature<sup>11</sup></b>      | -40°C to 80°C (-40°F to +176°F)  | <b>Vibration resistance</b><br>(2-100Hz, IEC60068-2-26,<br>EN50155, EN61373) |                           |
| <b>Storage Temperature</b>                     | -40°C to 100°C (-40°F to +212°F) |  | 2g per axis               |
| <b>RoHS (2002/95/EC)</b>                       | Compliant                        | <b>Relative humidity</b>   | 95% non-condensing @ 40°C |
| <b>Impact resistance</b><br>(EN50155, EN61373) | 15/11 g/ms                       | <b>UL flammability rating</b><br>(housing)                                   | UL 94 V0                  |

11. Operating temperature range for RGC..P (overtemperature protection) is -30°C to 70°C (-22°F to 158°F)

12. Applicable to models RGC1...15.KE, RGC1...20.KE and RGC1...30.KE


## Filtering - EN / IEC 55011 Class A compliance (for class B compliance contact us)

| Part Number     | Suggested filter for compliance          | Maximum Heater current |
|-----------------|--|------------------------|
| RGC1A23..15     | 68nF / 275 V / X1                        | 20A                    |
| RGC1A23..20     | 68nF / 275 V / X1                        | 20A                    |
| RGC1A23..30     | 220 nF / 275V / X1                       | 30A                    |
| RGC1A23..40     | 220 nF / 275V / X1<br>330 nF / 275V / X1 | 30A<br>45A             |
| RGC1A23..60     | 220 nF / 275V / X1<br>330 nF / 275V / X1 | 30A<br>45A             |
| RGC1A23..90GGEP | 330 nF / 275V / X1<br>470 nF / 275V / X1 | 35A<br>65A             |
| RGC1A60..15     | 100 nF / 760V / X1                       | 20A                    |
| RGC1A60..20     | 100 nF / 760V / X1                       | 20A                    |
| RGC1A60..30     | 220 nF / 760V / X1                       | 30A                    |
| RGC1A60..40     | 220 nF / 760V / X1<br>330 nF / 760V / X1 | 25A<br>45A             |
| RGC1A60..60     | 220 nF / 760V / X1<br>330 nF / 760V / X1 | 25A<br>45A             |
| RGC1A60..90GGEP | 330 nF / 760V / X1<br>470 nF / 760V / X1 | 40A<br>65A             |

Note:


- Control input lines must be installed together to maintain products' susceptibility to Radio Frequency interference.
- Use of AC solid state relays may, according to the application and the load current, cause conducted radio interferences. Use of mains filters may be necessary for cases where the user must meet E.M.C requirements. The capacitor values given inside the filtering specification tables should be taken only as indications, the filter attenuation will depend on the final application.
- Performance Criteria 1: No degradation of performance or loss of function is allowed when the product is operated as intended.
- Performance Criteria 2: During the test, degradation of performance or partial loss of function is allowed. However when the test is complete the product should return operating as intended by itself.
- Performance Criteria 3: Temporary loss of function is allowed, provided the function can be restored by manual operation of the controls.

## Filter Connection Diagrams

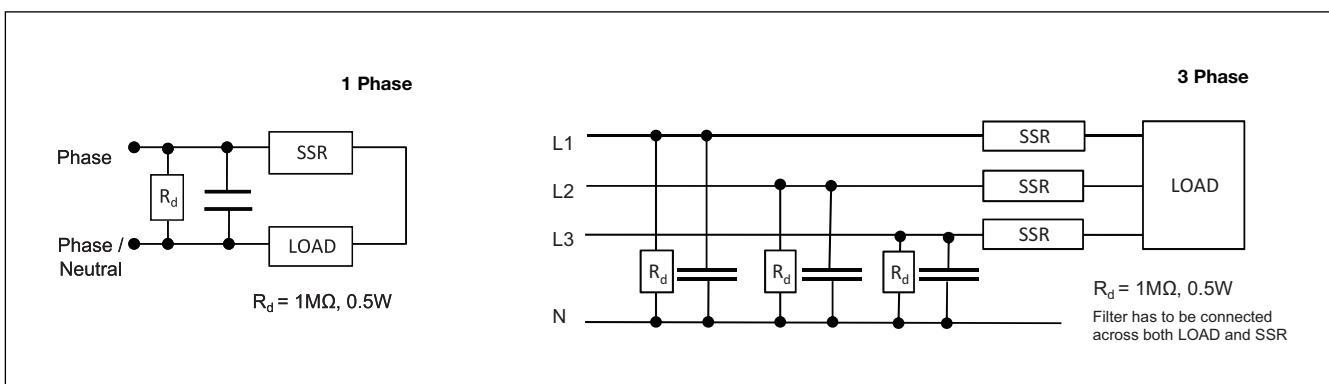


## Connection Diagram (No OTP)

AC Controlled

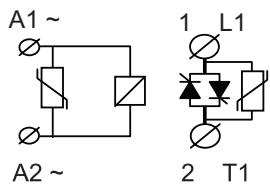

DC Controlled

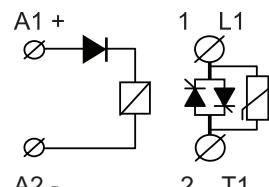


In AC controlled types only (RG..A..) a varistor is placed across A1/A2 terminals.


In DC controlled types only (RG..D..) a diode is placed in series with the control circuit for protection against reverse biased connection.

## Connection Diagram (with OTP)


RGC1...D20GKEP  
RGC1...D30GKEP  
RGC1...D40GGEP  
RGC1...D60GGEP

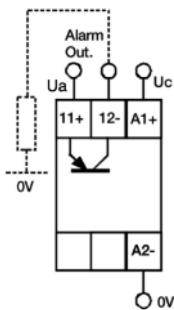


RGC1...D90GGEP

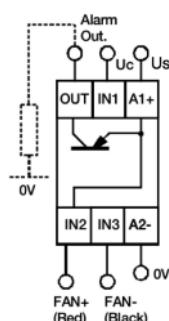

RGC1...A20GKEP  
RGC1...A30GKEP  
RGC1...A40GGEP  
RGC1...A60GGEP

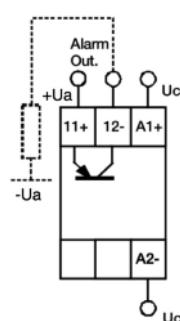

RGC1...A90GGEP

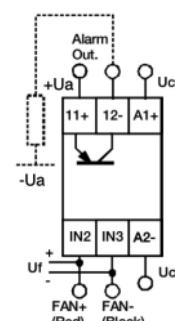

Uc: 5 - 32 VDC  
Ua: max 35VDC  
Alarm Output: max. 50mA




Uc: 5 - 32 VDC  
Us: 24 VDC  
Alarm Output: max. 50mA

Uc: 24 - 275 VAC  
24 - 190 VDC  
Ua: max 35VDC  
Alarm Output: max. 50mA




Uc: 24 - 275 VAC  
24 - 190 VDC  
Ua: max. 35 VDC  
Alarm Output: max. 50mA  
Ur: 24 VDC

## Terminal Layout and Dimensions

RGC...15KKE

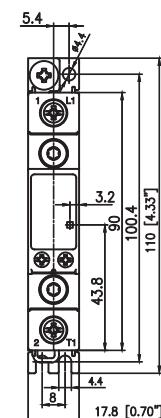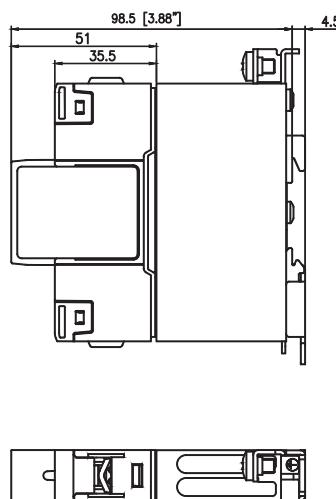

RGC...15MKE

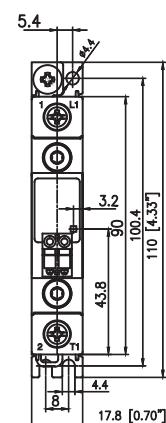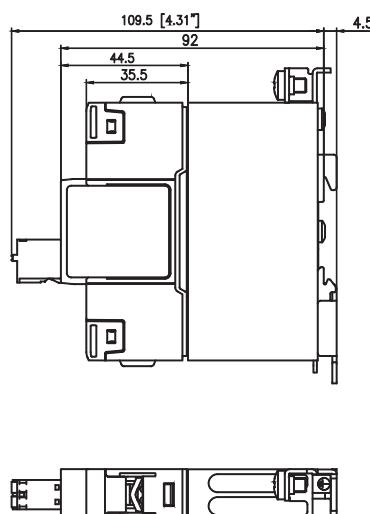

1/L1: Supply connection

2/T1: Load connection

A1 (+): Positive control signal


A2 (-): Control ground

\* Housing width tolerance +0.5mm, -0mm...as per DIN43880


All dimensions in mm

## Terminal Layout and Dimensions (cont).


RGC...20KKE

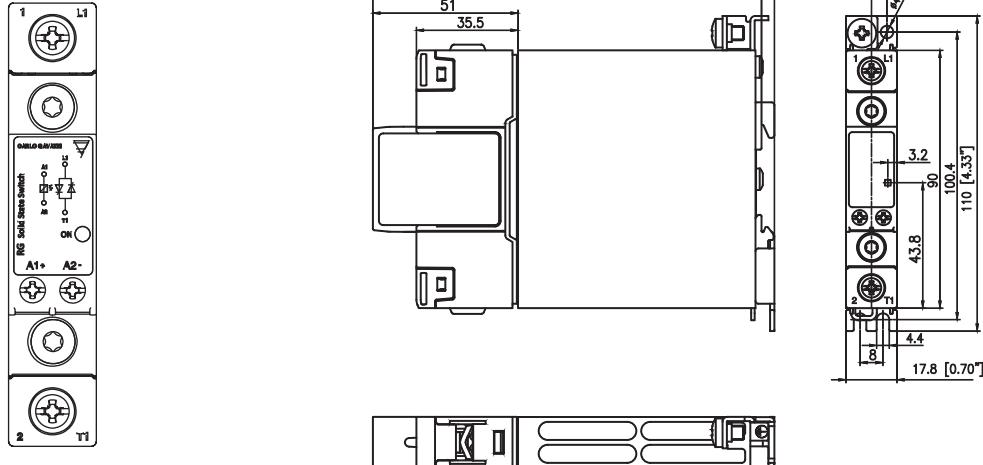

RGC...20MKE

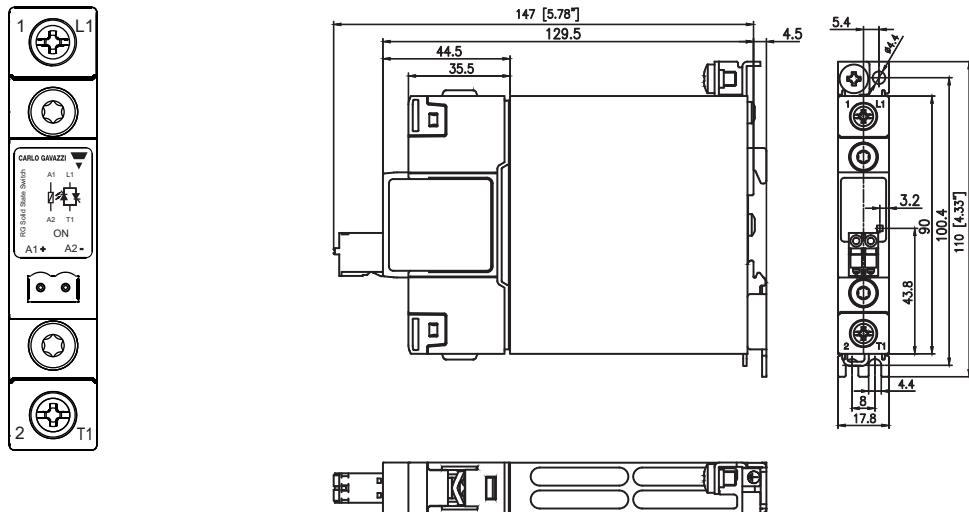

RGC...30KKE

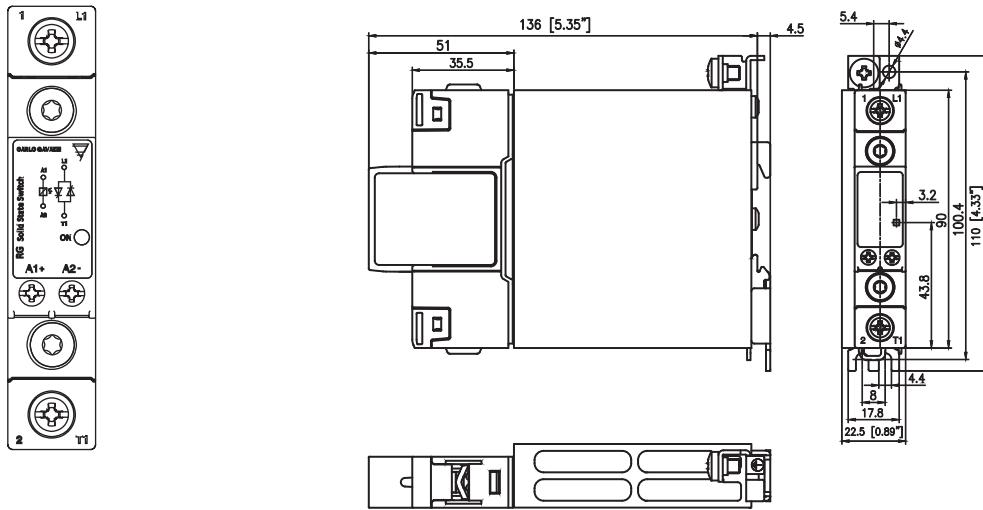

1/L1: Supply connection

2/T1: Load connection



A1 (+): Positive control signal

A2 (-): Control ground




\* Housing width tolerance +0.5mm, -0mm...as per DIN43880  
All dimensions in mm

## Terminal Layout and Dimensions (cont.)




RGC...30MKE

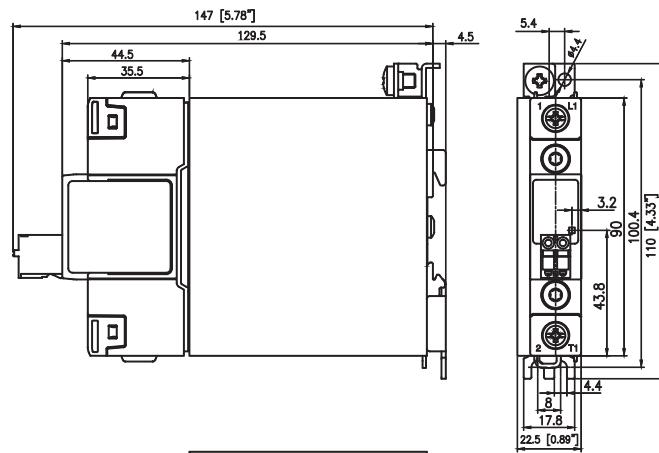

RGC...40KGE

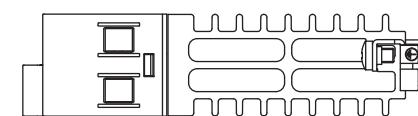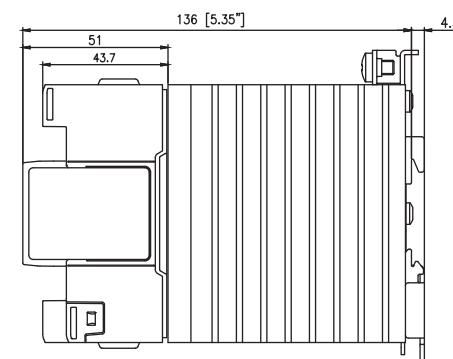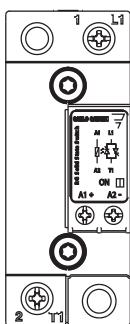

RGC...40MGE

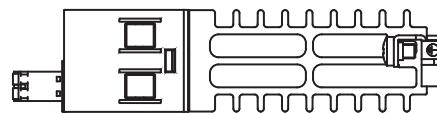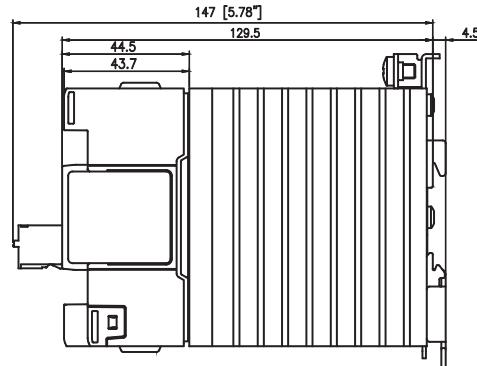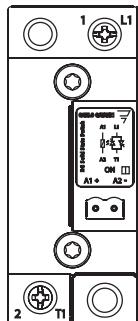

1/L1: Supply connection

2/T1: Load connection


A1 (+): Positive control signal

A2 (-): Control ground


\* Housing width tolerance +0.5mm, -0mm...as per DIN43880  
All dimensions in mm

## Terminal Layout and Dimensions (cont.)


RGC...60KGE

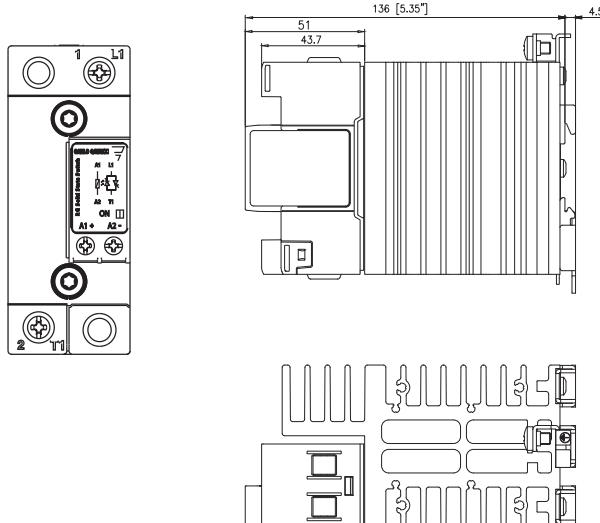

RGC...20GKEP

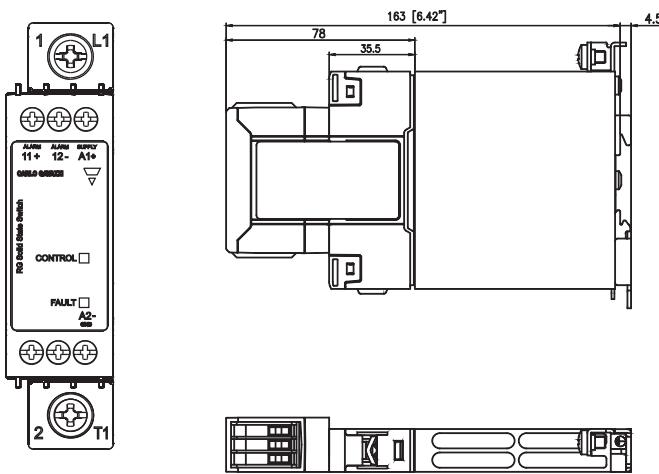

RGC...30GKEP

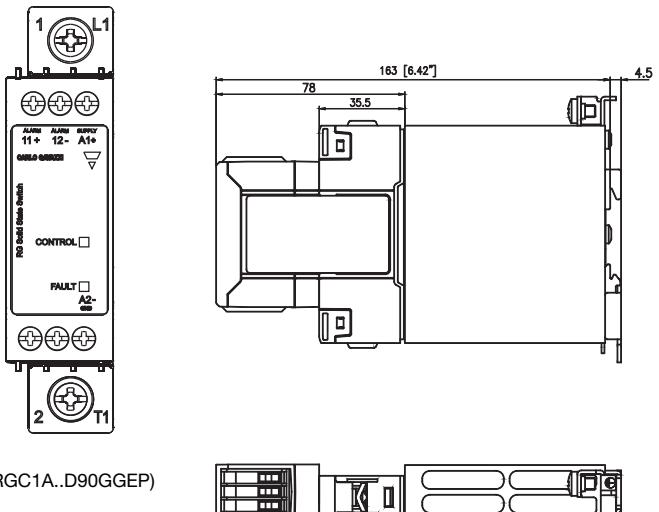

1/L1: Supply connection

2/T1: Load connection

A1 (+): Positive control signal

(Positive supply in case of RGC1A..D90GGEP)

A2 (-): Control ground

IN1: Control signal (only for RGC1A.. D 90GGEP)

IN2: Fan + supply (only for RGC1A60A90GGEP)

IN3: Fan - supply (only for RGC1A60A90GGEP)


11 +: Alarm output (+)

OUT, 12 - : Alarm output (-)


\* Housing width tolerance +0.5mm, -0mm...as per DIN43880  
All dimensions in mm

## Terminal Layout and Dimensions (cont.)


RGC...40GGEP

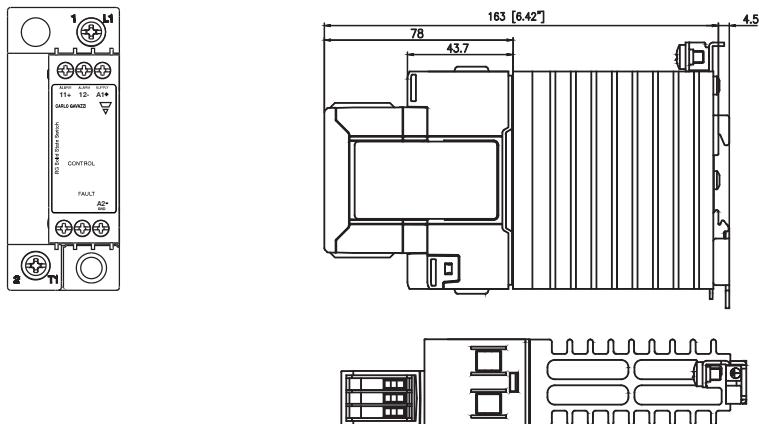

RGC...60GGEP

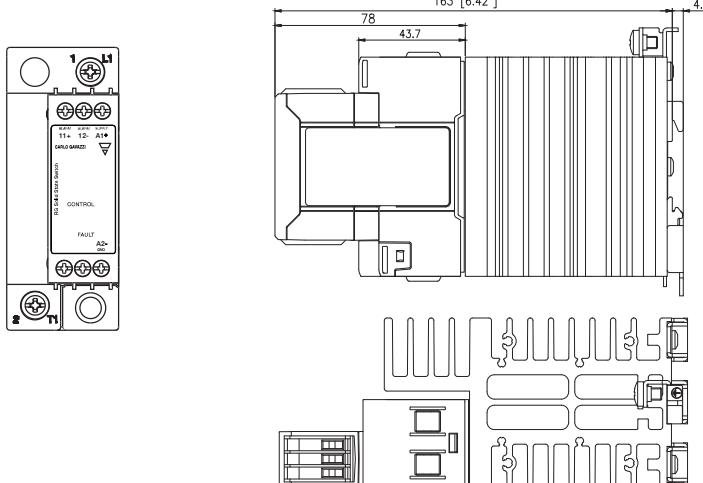


RGC...90GGEP

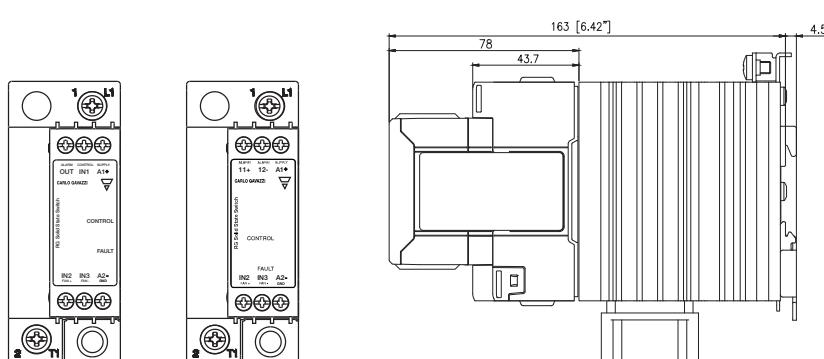

RGC...D90GGEP

RGC...A90GGEP

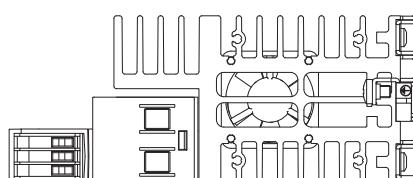

- 1/L1: Supply connection
- 2/T1: Load connection
- A1 (+): Positive control signal (Positive supply in case of RGC1A..D90GGEP)
- A2 (-): Control ground
- IN1: Control signal (only for RGC1A.. D90GGEP)
- IN2: Fan + supply (only for RGC1A60A90GGEP)
- IN3: Fan - supply (only for RGC1A60A90GGEP)
- 11 + : Alarm output (+)
- OUT, 12 - : Alarm output (-)

\* Housing width tolerance +0.5mm, -0mm...as per DIN43880  
All dimensions in mm

## Connection Specifications

### POWER CONNECTIONS: 1/L1, 2 /T1

Use 75°C copper (Cu) conductors

#### Stripping Length (X)

RGC..15.KE. ; RGC..20.KE. ; RGC..30.KE.

RGC..40.GE. ; RGC..60.GE. ; RGC..90GGEP

#### Connection type

12mm




11mm

#### Rigid (Solid & Stranded)

UL/ cUL rated data

M4 screw with captivated washer

M5 screw with box clamp



2 x 2.5..6 mm<sup>2</sup>  
2 x 14.. 10 AWG

1 x 2.5..6 mm<sup>2</sup>  
1 x 14.. 10 AWG

1 x 6..25mm<sup>2</sup>  
1 x 10..3 AWG

#### Flexible with end sleeve



2 x 1.0 ... 2.5mm<sup>2</sup>  
2 x 2.5..4mm<sup>2</sup>  
2 x 18.. 14 AWG  
2 x 14.. 12 AWG

1 x 1.0..4mm<sup>2</sup>  
1 x 18.. 12 AWG

1 x 2.5..16mm<sup>2</sup>  
1 x 14.. 6 AWG

#### Flexible without end sleeve



2 x 1.0 ... 2.5mm<sup>2</sup>  
2 x 2.5.. 6mm<sup>2</sup>  
2 x 18.. 14 AWG  
2 x 14.. 10 AWG

1 x 1.0.. 6mm<sup>2</sup>  
1 x 18.. 10 AWG

1 x 4.. 25mm<sup>2</sup>  
1 x 12.. 3 AWG

#### Torque specifications



2 Nm (17.7 in-lb).  
M4, Pozidriv 2

2.5 Nm (22 in-lb).  
M5, Pozidriv 2

#### Aperture for termination lug

12.3mm

N/A

#### Protective Earth Connection



M5, 1.5Nm (13.3 in-lb)

Note: M5 PE screw not provided with SSR. PE connection required when product is intended to be used in Class 1 applications according to EN/IEC 61140.

### CONTROL CONNECTIONS: A1(+), A2(-)

Use 60/75°C copper (Cu) conductors

#### Torque specifications



RGC..KKE, KGE

0.5 Nm (4.4 in-lb); M3, Pozidriv 1

RGC....MKE, MGE


#### Stripping Length (X)

8mm

12 - 13mm

#### Rigid (Solid & Stranded)

UL/ cUL rated data



2 x 0.5..2.5mm<sup>2</sup>  
2 x 18..12 AWG

1 x 0.2..2.5mm<sup>2</sup>  
1 x 24..12 AWG

#### Flexible with end sleeve



2 x 0.5..2.5mm<sup>2</sup>  
2 x 18..12AWG

1 x 0.5..2.5mm<sup>2</sup>  
1 x 18..12AWG

### CONTROL CONNECTIONS: A1(+), A2(-), IN1, IN2, IN3, 11 (+), 12(-), OUT

Use 60/75°C copper (Cu) conductors

#### Torque specifications



RGC...GGEP

0.5 Nm (4.4 in-lb); M3, Pozidriv 1


#### Stripping Length (X)

6mm

6mm

#### Rigid (Solid & Stranded)

UL/ cUL rated data




2 x 1.0..2.5mm<sup>2</sup>  
2 x 18..14 AWG

#### Flexible with end sleeve



2 x 1.0..2.5mm<sup>2</sup>  
2 x 18..14 AWG

## Installation Instructions

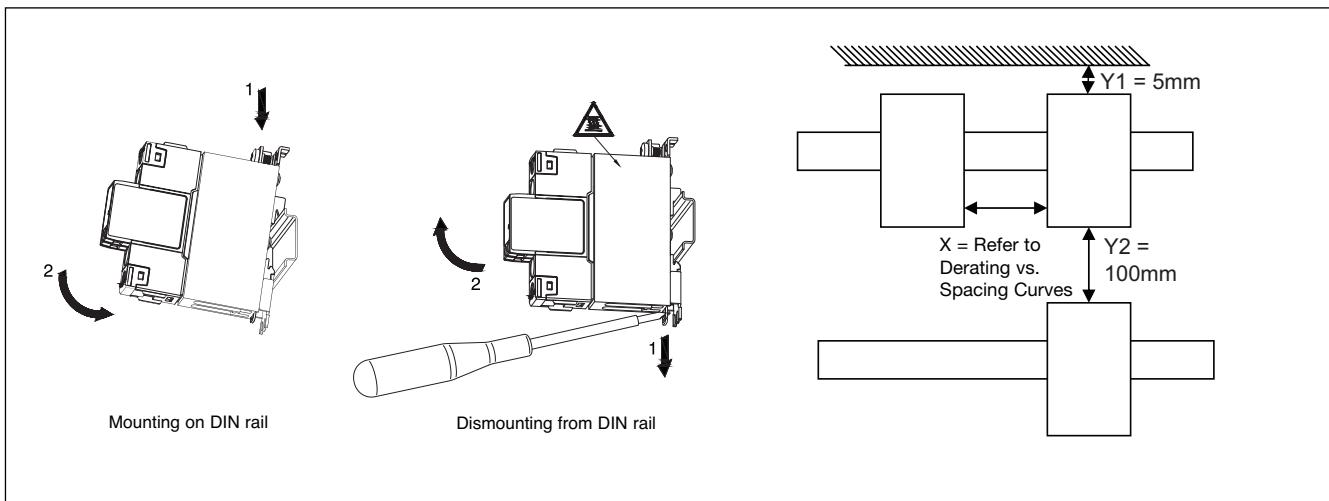

## Short Circuit Protection

### Protection Co-ordination, Type 1 vs Type 2:

Type 1 protection implies that after a short circuit, the device under test will no longer be in a functioning state. In type 2 co-ordination the device under test will still be functional after the short circuit. In both cases, however the short circuit has to be interrupted. The fuse between enclosure and supply shall not open. The door or cover of the enclosure shall not be blown open. There shall be no damage to conductors or terminals and the conductors shall not separate from terminals. There shall be no breakage or cracking of insulating bases to the extent that the integrity of the mounting of live parts is impaired. Discharge of parts or any risk of fire shall not occur.

The product variants listed in the table hereunder are suitable for use on a circuit capable of delivering not more than 100,000A rms Symmetrical Amperes, 600 Volts maximum when protected by fuses. Tests at 100,000A were performed with Class J fuses, fast acting; please refer to the table below for maximum allowed ampere rating of the fuse. Use fuses only.

## Co-ordination type 1 (UL508)

| Part No.    | Max. fuse size [A] | Class | Current [kA] | Voltage [VAC] |
|-------------|--------------------|-------|--------------|---------------|
| RGC..15     | 30                 | J     | 100          | Max. 600      |
| RGC..20     | 30                 | J     | 100          | Max. 600      |
| RGC..30     | 30                 | J     | 100          | Max. 600      |
| RGC..40     | 40                 | J     | 100          | Max. 600      |
| RGC..60     | 40                 | J     | 100          | Max. 600      |
| RGC..90GGEP | 40                 | J     | 100          | Max. 600      |

## Co-ordination type 2 (IEC EN 60947-4-2/ -4-3)

| Part No.    | Ferraz Shawmut    |  | Siba              |               | Current [kA] | Voltage [VAC] |
|-------------|-------------------|--|-------------------|---------------|--------------|---------------|
|             | Max fuse size [A] | Part number                            | Max fuse size [A] | Part number   |              |               |
| RGC..15     | 32                | 6.9xx CP URD 22x58/32<br>(xx=00 or 21) | 32                | 50 142 06.32  | 100          | Max. 600      |
| RGC..20     | 32                | 6.9xx CP URD 22x58/32<br>(xx=00 or 21) | 32                | 50 142 06.32  | 100          | Max. 600      |
| RGC..30     | 40                | A70QS40-4                              | 32                | 50 142 06.32  | 100          | Max. 600      |
| RGC..40     | 70                | A70QS70-4                              | 63                | 50 194 20.63  | 100          | Max. 600      |
| RGC..60     | 90                | A70QS90-4                              | 80                | 50 194 20.80  | 100          | Max. 600      |
| RGC..90GGEP | 100               | A70QS100-4                             | 100               | 50 194 20.100 | 100          | Max. 600      |

## Protection with Miniature Circuit Breakers


| Solid State Relay<br>type | Model no. for<br>Z - type M. C. B.<br>(rated current) | Model no. for<br>B - type M. C. B.<br>(rated current) | Wire cross<br>sectional area [mm <sup>2</sup> ] | Minimum length of<br>Cu wire conductor [m] <sup>13</sup> |
|---------------------------|---|---|---|--|
| RGC..15, RGC..20          | S201 - Z4 (4A)<br>S201 - Z6 UC (6A)                   | S201 - B2 (2A)<br>S201 - B2 (2A)                      | 1.0<br>1.0<br>1.5                               | 21.0<br>21.0<br>31.5                                     |
| RGC..30                   | S201 - Z10 (10A)                                      | S201-B4 (4A)  | 1.0<br>1.5<br>2.5                               | 7.6<br>11.4<br>19.0                                      |
|                           | S201 - Z16 (16A)                                      | S201-B6 (6A)  | 1.0<br>1.5<br>2.5<br>4.0                        | 5.2<br>7.8<br>13.0<br>20.8                               |
|                           | S201 - Z20 (20A)                                      | S201-B10 (10A)  | 1.5<br>2.5                                      | 12.6<br>21.0   |
|                           | S201 - Z25 (25A)                                      | S201-B13 (13A)  | 2.5<br>4.0                                      | 25.0<br>40.0   |
|                           | S202 - Z25 (25A)                                      | S202-B13 (13A)  | 2.5<br>4.0                                      | 19.0<br>30.4   |
| RGC..40                   | S201 - Z25 (25A)                                      | S201-B13 (13A)  | 2.5<br>4.0<br>6.0                               | 7.0<br>11.2<br>16.8                                      |
| RGC..60                   | S201 - Z25 (25A)                                      | S201-B13 (13A)  | 2.5<br>4.0<br>6.0                               | 7.0<br>11.2<br>16.8                                      |
| RGC..90GGEP               | S201 - Z20 (20A)                                      | S201-B10 (10A)  | 1.5<br>2.5<br>4.0                               | 4.2<br>7.0<br>11.2                                       |
|                           | S202 - Z20 (20A)                                      | S202-B10 (10A)  | 1.5<br>2.5<br>4.0                               | 1.8<br>3.0<br>4.8  |
|                           | S201 - Z32 (32A)                                      | S201-B16 (16A)  | 2.5<br>4.0<br>6.0                               | 13.0<br>20.8<br>31.2                                     |
|                           | S202 - Z32 (32A)                                      | S202-B16 (16A)  | 2.5<br>4.0<br>6.0<br>10.0                       | 5.0<br>8.0<br>12.0<br>20.0                               |
|                           | S202 - Z50 (50A)                                      | S202-B25 (25A)  | 4.0<br>6.0<br>10.0                              | 14.8<br>22.2<br>37.0                                     |

13. between MCB and Load (including return path which goes back to the mains).

Note: A prospective current of 6kA and a 230/400V power supply system is assumed for the above suggested specifications. For cables with different cross section than those mentioned above please consult Carlo Gavazzi's Technical Support Group.

## Accessories

### Control Plugs

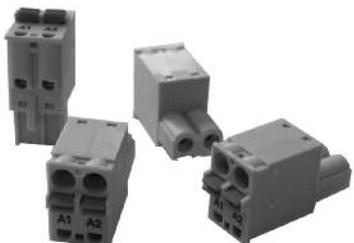

#### Ordering Key

Pack of 10 spring loaded control plugs

**RGM25**

\* Refer to 'Connection Specifications' section for further details.