



Undervoltage relay BA 9043, AA 9943 VARIMETER

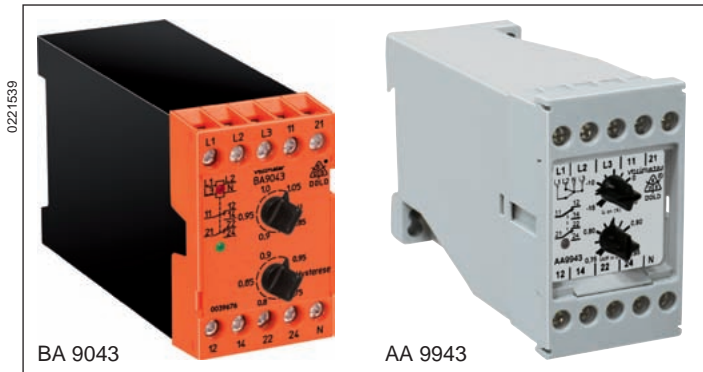

- According to IEC 255, EN 60 255, VDE 0435 part 303
- 3-phase
- For nominal voltage of 3 AC 100 / 57 to 690 / 400 V
- Measures arithmetic mean value
- Adjustable operate and release value
- For 3p3w or 3p4w systems
- BA 9043 optionally with adjustable time delay
- Closed circuit operation
- LED indicator for operation and state of contact
- Insensitive to harmonics
- Frequency up to 400 Hz
- Width 45 mm

Function diagram

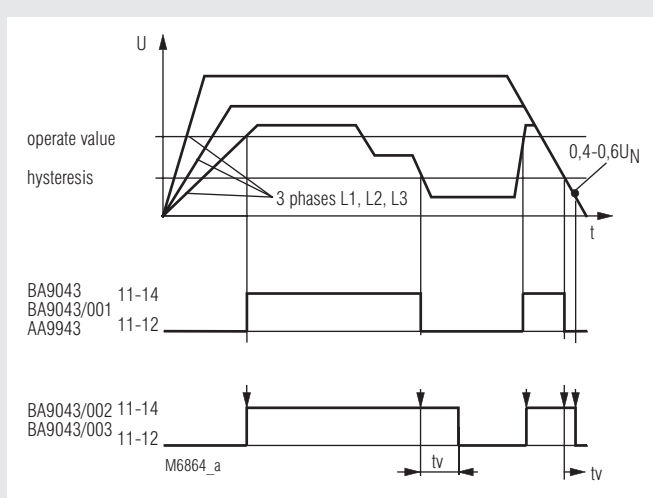

Approvals and marking



Application

Undervoltage detection in 3 phase systems


Indicators

upper LED: (only BA 9043)	on, when voltage connected
lower LED:	on, when output contact activated

Notes

For determination of the arithmetic mean value of the voltage the 3 phases are measured against N. The variants without N (/001 and /003) measure L1 and L2 against L3. delay the delay is only active at $U \geq 0,6 U_N$. At $< 0,4 U_N$ the relay switches off without delay.

Circuit diagram

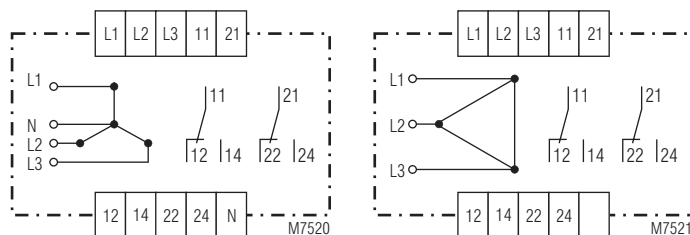

BA 9043, BA 9043/002
AA 9943

BA 9043/001, BA 9043/003
AA 9943/001

Technical Data

Input

Nominal voltage U_N

BA 9043, BA 9043/002
AA 9943:

3/N AC 100/57 V; 220/127 V; 400/230 V
415/240 V; 440/254 V; 500/290 V

BA 9043, BA 9043/002:
BA 9043/001, BA 9043/003
AA 9943/001:

3 AC 690/400 V

3 AC 100 V; 220 V; 400 V; 415 V, 440 V;
500 V

BA 9043/001, BA 9043/003:
3 AC 690 V

Max. overload

BA 9043: 1.2 U_N continuously
AA 9943: 1.1 U_N continuously

Nominal consumption:

AC 4 VA

Nominal frequency:

50 ... 400 Hz

Frequency range:

$\pm 5 \%$

Temperature influence:

$< 0.05 \%$ / K

Setting ranges

Response value:	0.85 ... 1.05 U_N , infinite variable with upper potentiometer
Hysteresis:	0.75 ... 0.95 of operate value
Setting accuracy:	$\leq \pm 10 \%$
Switching delay t_M:	see diagram switching delay
Time delay t_V:	infinite variable from 0.5 ... 10 sec for BA 9043/002, BA 9043/003 Between 0.4 and 0.6 U_N the contacts fall back according to the diagram without additional delay

Technical Data

Output

Contacts

BA 9043:	2 changeover contacts
AA 9943.11:	1 changeover contact
AA 9943.12:	2 changeover contacts
Thermal current I_{th}:	6 A; see diagram
	Continuous current limit curve

Switching capacity

to AC 15		
NO contact:	3 A / AC 230 V	IEC/EN 60 947-5-1
NC contact:	1 A / AC 230 V	IEC/EN 60 947-5-1
to DC 13		
NO contact:	1 A / DC 24 V	IEC/EN 60 947-5-1
NC contact:	1 A / DC 24 V	IEC/EN 60 947-5-1

Electrical life

to AC 15 at 3 A, AC 230 V: 3 x 10⁵ switching cycles

Short circuit strength

max. fuse rating: 4 A gL IEC/EN 60 947-5-1

Mechanical life: > 30 x 10⁶ switching cycles

General Data

Operating mode: Continuous operation

Temperature range: - 20 ... + 60°C

Clearance and creepage distances

rated impuls voltage / pollution degree: 4 kV / 2 IEC 60 664-1

EMC

Electrostatic discharge: 8 kV (air) IEC/EN 61 000-4-2

HF irradiation: 10 V/m IEC/EN 61 000-4-3

Fast transients: 2 kV IEC/EN 61 000-4-4

Surge voltages between

wires for power supply: 1 kV IEC/EN 61 000-4-5

between wire and ground: 2 kV IEC/EN 61 000-4-5

HF wire guided: 10 V IEC/EN 61 000-4-6

Interference suppression: Limit value class B EN 55 011

Degree of protection

Housing: IP 40 IEC/EN 60 529

Terminals: IP 20 IEC/EN 60 529

Housing: Thermoplastic with V0 behaviour according to UL subject 94

Vibration resistance: Amplitude 0.35 mm IEC/EN 60 068-2-6 frequency 10 ... 55 Hz

Climate resistance: 20 / 060 / 04 IEC/EN 60 068-1

Terminal designation: DIN EN 50 005

Wire connection: 2 x 2.5 mm² solid or 2 x 1.5 mm² stranded wire with sleeve DIN 46 228-1/-2/-3/-4

Wire fixing: Flat terminals with self-lifting clamping piece IEC/EN 60 999-1

Mounting: DIN rail IEC/EN 60 715

Weight

BA 9043: 310 g

AA 9943: 300 g

Dimensions

Width x height x depth



BA 9043: 45 x 73 x 132 mm

AA 9943: 45 x 77 x 127 mm

Variants

AA 9943/001:	without neutral
AA 9943/175:	for nuclear power plants
BA 9043/001:	without neutral
BA 9043/002:	with neutral, adjustable time delay $t_v = 0.5 \dots 10 \text{ sec}$
BA 9043/003:	without neutral, adjustable time delay $t_v = 0.5 \dots 10 \text{ sec}$

Ordering example for Variants

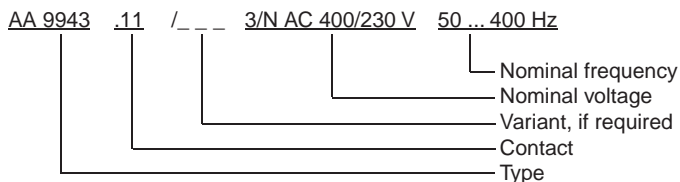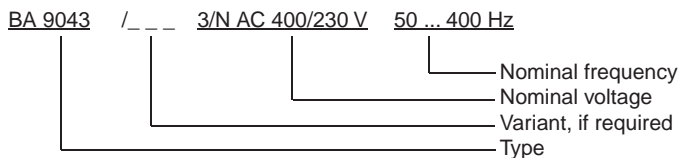


Accessories

AA 9943:	
K 70-34	Cover

Standard type

BA 9043	3/N AC 400 / 230 V	50 ... 400 Hz	
Article number:	0039676		stock item
• for 3p4w systems			
• Nominal voltage U_N :	3/N AC 400 / 230 V		
• Output:	2 changeover contacts		
• Width:	45 mm		

Characteristics

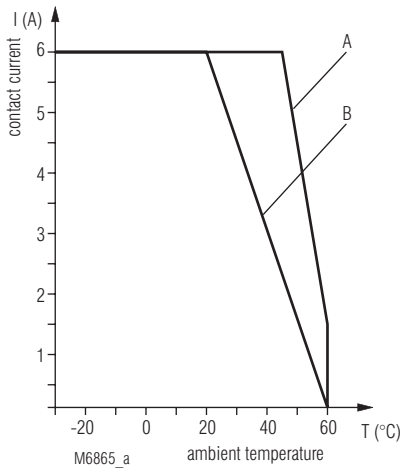

Continuous current limit curve

A = Devices mounted with 2 cm distance
 B = Devices mounted without distance

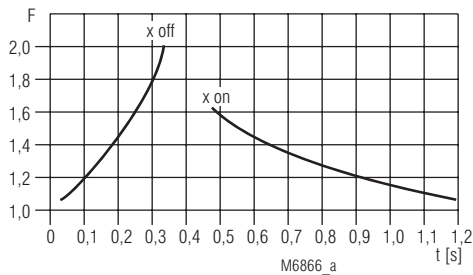


Diagram switching delay

Switching delay t_M :

When the voltage changes fast on the measuring input, the arithmetic mean value can only adjust after a short delay.

Example:

$$F = \frac{U_{\text{applied}}}{U_{\text{setting}}} \quad F = \frac{240 \text{ V}}{190 \text{ V}} = 1.26$$

U setting = 190 V

U applied = 240 V

according to diagram:

$t_{M,\text{on}}$ = approx. 800 ms

$t_{M,\text{off}}$ = approx. 100 ms

Specification for tender for BA 9043

Undervoltage relay according to IEC 255, VDE 0435 for nominal voltage of 3 AC 100/57 to 500/290 V. Adjustable operate and release value, for 3p4w systems
 Width 45 mm
 Type BA 9043
 Manufactured by E. DOLD & SÖHNE KG

Undervoltage relay according to IEC 255, VDE 0435 for nominal voltage of 3 AC 100/57 to 500/290 V. Adjustable operate and release value, for 3p4w systems, adjustable time delay up to 10 s.
 Width 45 mm
 Type BA 9043/002
 Manufactured by E. DOLD & SÖHNE KG

Undervoltage relay according to IEC 255, VDE 0435 for nominal voltage of 3 AC 100/57 to 500/290 V. Adjustable operate and release value, for 3p3w systems
 Width 45 mm
 Type BA 9043/001
 Manufactured by E. DOLD & SÖHNE KG

Undervoltage relay according to IEC 255, VDE 0435 for nominal voltage of 3 AC 100/57 to 500/290 V. Adjustable operate and release value, for 3p3w systems, adjustable time delay up to 10 s.
 Width 45 mm
 Type BA 9043/003
 Manufactured by E. DOLD & SÖHNE KG

