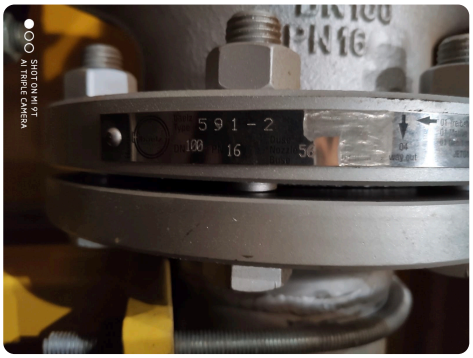


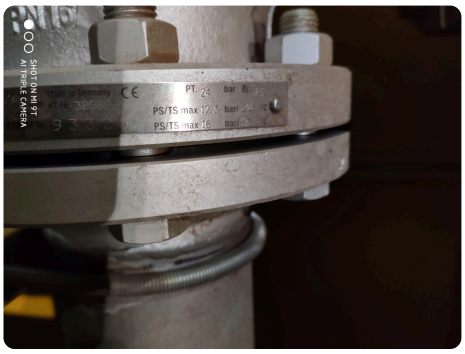

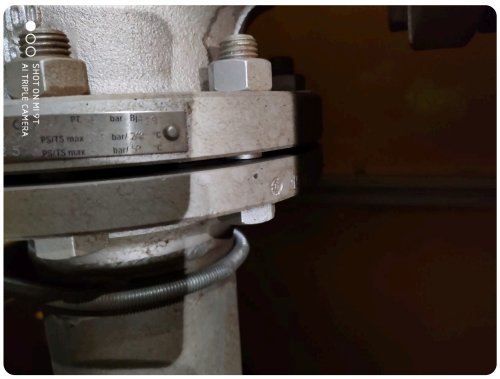


**4. Actuator**

| | | | |
|---|---|---|---|
| ☒ electric 4.1 | ☐ pneumatic 4.2 | ☐ manual operation | ☐ without actuator |

**4.1 Electric actuator**

| | | | | |
|---|---|---|---|---|
| **Supply voltage** | ☒ 230 V, 50/60 Hz | ☐ 115 V, 50/60 Hz | ☐ 24 V, 50/60 Hz | ☐ 400 V, 50/60 Hz |
| **Fail-safe function** | ☐ NO | ☐ YES, in case of power failure straight way<br>☐ closed ☐ open | | |
| **Control** | ☐ OPEN/CLOSE | ☐ 3-point step | ☒ 0/2...10 V | ☐ 0/4...20 mA |
| **Accessories** | | | | |
| **Position feedback** | ☐ 0/2...10 V | ☐ 0/4...20 mA | ☐ Potentiometer, Ohm-range: ..... | |
| **Limit switches** | ☐ stroke-dependent | ☐ **Baelz controller incorporated in the actuator** | | |
| **Comments:** | | | | |