


## DIN cross-connector for flat conductor

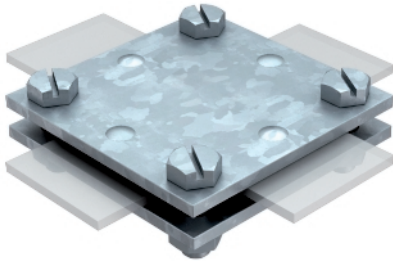

- Meets the requirements of VDE 0185-305-3 (IEC/ EN 62305-3)
- Fit: Max. FL 30 x FL 30 or max. FL 40 x FL 40
- Without adapter plate
- Mounted with 4 hexagonal bolts M8 x 25 and 4 hexagonal nuts M8 (F)

Type	Fit mm	Di- men- sion A mm	Dimen- sion B mm	Lightning current carrying capacity kA	Pack. pcs	Weight kg/100 pcs.	Item No.
256 A-DIN 30 FT	max. FL30	60	60	H/100	10	27,800	5314658
256 A-DIN 40 FT	max. FL40	80	80	H/100	10	38,800	5314666

**St** Steel

**FT** Hot-dip galvanised

### Dimensions

